


Pannelli parete in poliuretano a fissaggio nascosto


Wall panels with polyurethane insulation with concealed fasteners

Dachpaneele, isoliert mit PU-Hartschaum, mit verdeckter Befestigung

Panneaux de bardage avec isolation en mousse polyuréthane avec fixation invisible

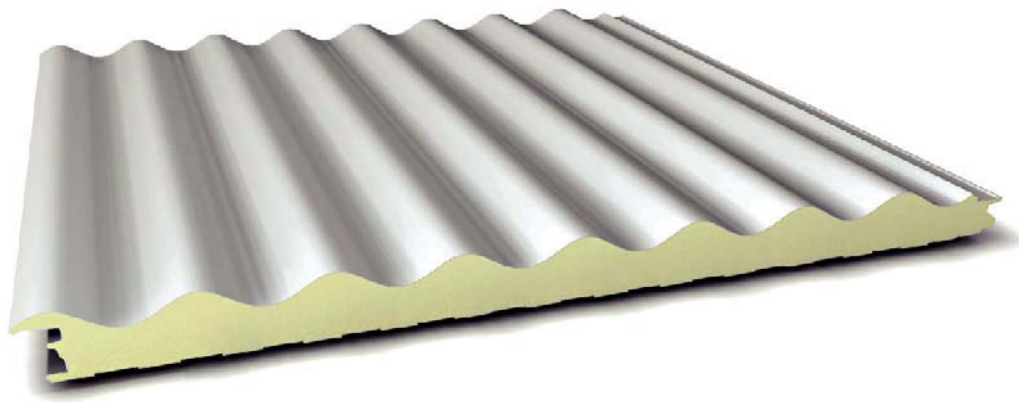


Supporto Interno:
PROFILO DOGATO



- Spessore (mm)
- Thickness
- Plattenstärke
- Epaisseur

PARTICOLARE DEL GIUNTO



Spessore nominale (mm)	Trasmittanza Termica in Accordo UNI EN 14509 A.10 U (W/m ² K)	Coefficiente di Trasmissione Termica Medio Iniziale in Accordo EN ISO 6946 K (W/m ² K)
70	0,49	0,35
86	0,36	0,26
106	0,27	0,22
126	0,22	0,18

DISEGNO TECNICO SUPER TOP ONDULATO

