

flyscreens



EFFEZETA®
S Y S T E M

Live protected. Live better.

index



the company

- 05 the company
- 06 why choosing Effezeta System?
- 09 our idea of a flyscreen
- 10 top products.



pleated line

- 22 **sincropliss**
synchronised controlled opening and compact footprint
- 24 **colomba I**
controlled lateral opening and compact footprint
- 26 **colomba v**
controlled vertical opening and compact footprint
- 28 **colomba sole luna**
combined darkening and flyscreen use and compact footprint
- 30 **picoplis**
lateral with retractable guide and compact footprint
- 32 **plissè**
lateral with retractable guide for large dimensions



wrap-around line

- 36 **aries**
vertical with spring and brush
- 38 **aries self block**
vertical with spring, brush and expansion fastening
- 40 **laries**
lateral with spring and brush
- 42 **aries / laries soft**
vertical/lateral with spring and controlled opening
- 44 **caries**
vertical with spring-chain and brush
- 46 **ara**
vertical with spring and windproof buttons
- 48 **tara press up**
vertical with spring, windproof buttons and pressure opening
- 50 **idra**
lateral with spring and windproof buttons
- 52 **leo**
vertical with chain and windproof buttons
- 54 **Piuma® v**
vertical with telescopic spring and anti-gust windproof system
- 56 **Mega®**
lateral with windproof system and retractable mobile guide
- 58 **scenipro**
lateral with retractable mobile guide
- 60 **picoscenica**
lateral with retractable mobile guide and compact footprint
- 62 **Oltre® V**
vertical with windproof zip for large dimensions
- 64 **Oltre® L**
lateral and corner with windproof zip for large dimensions



recessed systems

- 68 **recessed kit**
recessed kits and solutions
- 72 **apus**
vertical and lateral spring-loaded flyscreen with brush and built in kit
- lince**
- 74 vertical and lateral spring-loaded flyscreen with windproof buttons and built in kit
- auriga**
- 76 vertical and lateral spring-loaded flyscreen with recessed brush
- moon**
- 78 vertical spring-loaded flyscreen with recessed windproof buttons
- perseo**
vertical chain flyscreen
- 79 with recessed windproof buttons
- aquila**
lateral spring-loaded flyscreen
- 80 with recessed windproof buttons
- recessed Mega®**
recessed systems for Mega®
- 82 **recessed scenipro**
recessed systems for scenipro
- 84 **recessed plissè**
recessed systems for plissè
- 85 **recessed Colomba**
recessed systems for Colomba
- 86



rigid panels

- 90 **sagittario**
fixed panel
- 92 **capricorno**
hinged door
- 94 **freccia/freccia slide**
flyscreen with up-and-down panels and sliding mechanism

extras

- 98 **smart home and home automation**
- 100 **motorised flyscreens**
- 102 **taking measurements**
- 102 **glossary of accessories and options**
- 103 **showcase tools**
- 104 **nets and sheets**
- 106 **aluminium colour palette**
- 110 **fastening profiles and tubulars**



The company

EffeZeta System was founded in 1999 as a craft business in the small southern Italy village of Sant'Angelo d'Alife (Caserta). Today, the company is a large industrial business, competitive on the market both nationally and internationally. The company has evolved over time, always operating according to the same belief: feeling comfortable where one lives or works is fundamental to experience that environment at its best.

This is why our goal is to help enhance any living space with signature products that can meet the needs of different people and adapt to a wide variety of environments. We are constantly investing in R&D to produce the best products and to keep up with the constant changes that, with increasing frequency, affect daily life.

Those that today are great enterprises, yesterday were nothing more than small ideas brought forth with courage and tenacity.

Vision













For over 20 years, EffeZeta System has been pursuing a single goal: offering modern and functional design solutions to improve people's lives.

Mission

We specialise in protection systems against insects, pests, pollen, sun and heat. In particular, we manufacture flyscreens, roller blinds, filter systems, darkening and technical interior blinds.



Why choosing Effezeta System?

-  Custom-made products
-  Free quotes
-  More than 50 flyscreen models
-  Products tested one by one
-  More than 25 colours available
-  Customer care
-  Customised solutions
-  Short delivery times
-  Repair Service
-  Extensive sales network
-  Smart and motorised products
-  Cutting-edge technologies

Made in Italy

We use exclusively Italian raw materials. Made in Italy, especially appreciated by international customers, is a guarantee of quality.



Safety

Safety, in the sense of protection from insects, pollen, sun and heat, is our ability to offer a product that increases the level of comfort for everyone.



Know how

We offer a highly qualified, young, dynamic and knowledgeable team in every department of our company: from production to logistics, sales network and customer service.



Sustainability

Ours are sustainable products. Aluminium is a 100% and infinitely recyclable raw material. In our factories, the machines are electric and are operated with energy generated by a photovoltaic system.



Research and Innovation

We have specialised consultants who carry out intensive research and experimentation to offer increasingly innovative solutions to meet tomorrow's challenges.



Certified quality

All our products bear the European Conformity Mark (CE), which guarantees the consumer that the product complies with European Community regulations throughout its manufacturing

cycle. Istituto Giordano is a technical body at the forefront of Product Testing, Certification, Research and Design and it carries out the certification of our products.

LegnoLegno is the national consortium of window and door manufacturers. Being a member means being part of a large chain of companies in the window and door sector.



Commercial network across the country

- 6 manufacturing sites in Campania
- 1 manufacturing site in Lombardy
- 1 manufacturing site in Lazio
- a whole fleet of drivers, dealers and agents across the nation

Internationality

For years, the company has strengthened its international presence by developing business relations, particularly in Europe, Africa and America.





Our idea of a flyscreen

A flyscreen today is a signature product in its own right, combining technology, aesthetics and functionality. Choosing to install or replace a flyscreen means choosing to improve the level of well-being and protection in everyday living environments.

Efezeta System offers solutions designed and tested to meet market demand and the needs of consumers, combining technology and experience, constant research and quality of raw materials, extensive customisation possibilities, both in terms of style and functionality, and constant customer care.

light

air

design

customisation

wellness

protection

functionality

technology

Not just flyscreens

Choosing Efezeta System allows you to add to your window frame a wide variety of protection systems, not only to solve problems caused by insects, but also to protect against heat and weather agents, and to better manage ventilation, light, privacy, security and thermal insulation.

Meet all your window frame needs with our

roller shutters
sunshades
technical interior blinds
and outdoor tents



There is only one “feather” that withstands the wind: Piuma


Piuma® is one of the most innovative projects from our development team: a wrap-around flyscreen with an effective and technological *wind-gust-proof* system.

This ultralight net is as light as a feather, but durable and with high visibility. It is equipped with a system that allows the net to move freely yet to be extremely resilient to external stresses.

The model is full optional, equipped with of Press Up opening, Slow System for a secure winding and telescopic guides.



TOP
PRODUCT

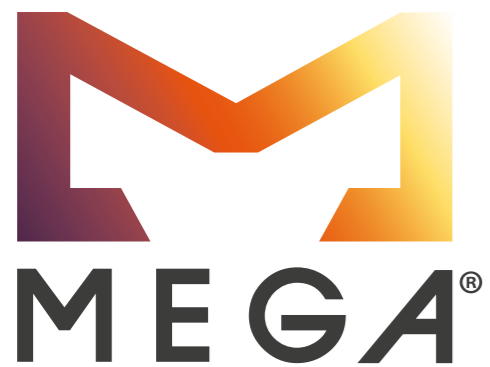

Protects more Resists more

Mega-protection, mega-resistance, and mega-comfort for one of our most popular products: a lateral-sliding flyscreen with a retractable track guide and windproof system. It is called Mega® because of its imposing appearance and sturdiness, not only in terms of wind resistance but also solidity, structural stability and the ability to cover large openings while retaining a modern and elegant look. Mega® won the Oscar del Serramento Italiano, organised by Guida Finestra, as the top ranked product in 2021.



TOP
PRODUCT



SINCROPLISS

**The only one with
synchronised
movement**

Sincropliss is an exclusive flyscreen, patented by Effezeeta System, with simultaneous movement that allows both doors to be operated with a single command. In 2018, it was one of the Innovation Prize finalists at the R+T event of Stuttgart.



**TOP
PRODUCT**



**Beyond the possible.
Beyond measures.**

Oltre® V is a vertical wrap-around protection system for large openings with a highly resistant windproof zip. Particularly suitable for large rooms, pergolas, or verandas, it allows choosing the screening system to meet a variety of requirements: ultra-strong Fabrinet net, darkening or filtering fabric, or clear PVC fabric. Customisable through the choice of winch or motor drive system, it also offers the possibility of recessed profiles.



**TOP
PRODUCT**



OLTRE® L

**Beyond the possible.
Beyond measures.**

Oltre® L is a high-tech wrap-around flyscreen that covers large areas and can also create corner openings. Oltre® L can reach up to 4.5 metres per door, 9 metres on two doors. It is a unique product: guides with top and bottom zips; controlled opening to stop the flyscreen in any position and a floor profile of just 12.5 mm. The handle is integrated into the profile to ensure an elegant yet functional design.




**TOP
PRODUCT**

pleated line



pleated line

- 22 sincropliss**
synchronised controlled opening
and compact footprint
- 24 colomba l**
controlled lateral opening
and compact footprint
- 26 colomba v**
controlled vertical opening
and compact footprint
- 28 colomba sole luna**
combined darkening and flyscreen
use and compact footprint
- 30 picoplis**
lateral with retractable guide
and compact footprint
- 32 plissé**
lateral with retractable guide
for large dimensions

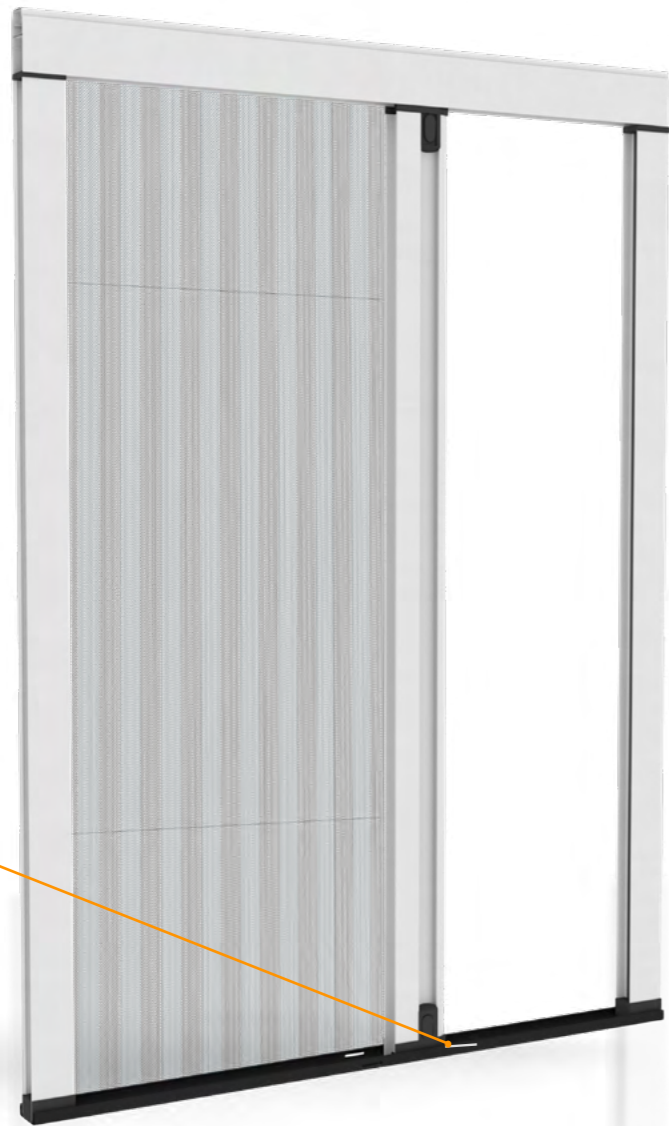

DRAINING HOLE.



Fastening type: bayonet with compensator



Fixed top guide

colomba L

Pleated flyscreen with opening laterally controlled and compact footprint



STANDARD FEATURES

- _____ Pleated black net 15 mm
- _____ Compact footprint 18 mm
- _____ 5 mm double-sided adhesive guide on bottom
- _____ Handle bar stationary in any position
- _____ Offset in height

Special nets and fabrics on request

- _____ Pleated net ●●
- _____ Coloured pleated net ●●●●●●
- _____ Pleated filtering fabric ●●●●●
- _____ Pleated darkening fabric ●●●●●

Optional on request

Compatible recessed profiles

VARIANTS


Bayonet coupling with compensator profile

Fixed top guide

The flyscreen is supplied **ALREADY SET**



double colomba
Double door

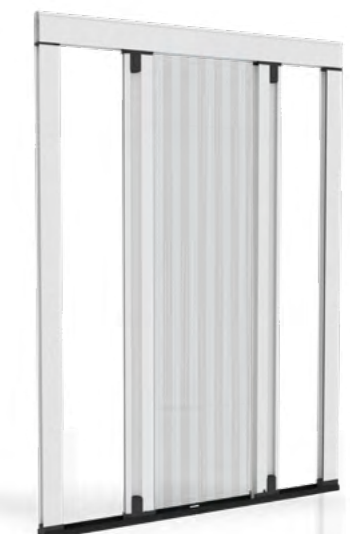

reverse colomba
Central net package



multiverse colomba
Doors in sequence

WHEN ORDERING

Dimensions must be provided in mm, specifying the base and then height and type of measurement provided.

COMPLETED MEASUREMENT: the flyscreen will have the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.

Offsetting: 9 mm in height




Net package size according to opening (mm)					
Opening (L)	500	600	800	1000	1400
Package (P)	80	85	88	90	95
Opening (L)	1500	1600	2000	2500	3000
Package (P)	100	105	105	125	150

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Colomba L	400	500	3000	3000
Colomba Double	800	500	6000	3000
Colomba Reverse	400	500	3000	3000
Colomba Multiverse	800	500	6000	3000

FOOTPRINT (mm)

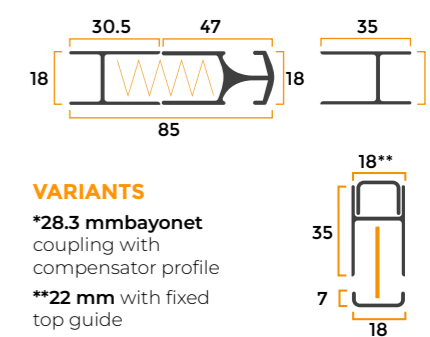

VARIANTS

*28.3 mm bayonet coupling with compensator profile
**22 mm with fixed top guide

For double door versions, also make sure that each door meets the recommended single door dimensions; specify off-centre opening when ordering, if desired.

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix	Walnut 102-70R	Cherry red natural	Striped Douglas	
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix	Medium walnut natural	Renolit clear	Renolit white	
Dark brown Painted	Green 6005 matt				Dark walnut natural	Renolit dark		

Ral

Raffaello

Copper-red

Wood

Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



**NO
BARRIER**



Updated version with double track chain bottom and top A

plissé

Pleated flyscreen with controlled lateral opening with retractable mobile guide

STANDARD FEATURES

- _____ Pleated black net 20 mm
- _____ Walk-on floor guide in PVC
- _____ Double track chain
- _____ Black handle
- _____ Suitable for large dimensions

VARIANTS

Pleated follow-on doors
Pleated flyscreen with two or three follow-on doors with controlled lateral opening with retractable mobile guide



Special nets and fabrics on request

Pleated net


Optional on request

Compatible recessed profiles



plissé double
Double door

Horizontal Section

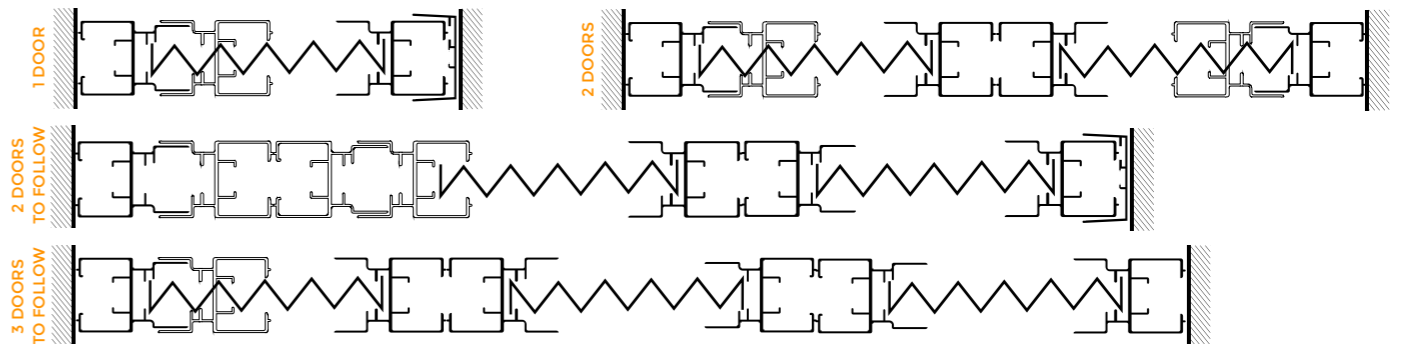

WHEN ORDERING

Dimensions must be provided in mm, specifying the base and then height and type of measurement provided.

COMPLETED MEASUREMENT: the flyscreen will have the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied 2 mm less on the base and height than the opening dimensions.

RECOMMENDED DIMENSIONS (in mm)



	L/min	H/min	L/max	H/max
Plissé	400	600	2000	3000
Plissé Double	800	600	4000	3000

IMPORTANT! The height must always exceed the width by 20 cm.

For double door versions, also ensure that each door meets the recommended single door dimensions; specify off-centre opening when ordering, if desired. **For dimensions that can be manufactured with follow-on doors, please contact the company.**

For widths greater than 1600 mm, it is advisable to request a net reinforcement at the time of ordering.

FOOTPRINT (mm)

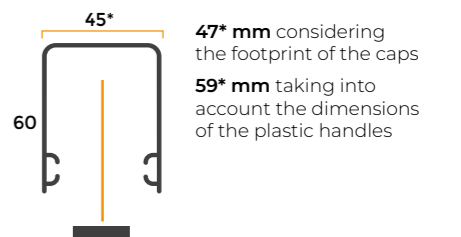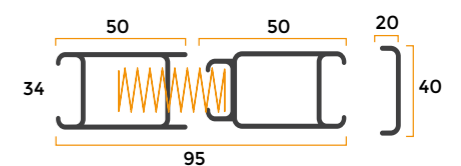

Aluminium Colours

<input type="checkbox"/> White 9010	<input type="checkbox"/> Ivory 1013	<input type="checkbox"/> Brown 8017 matt	<input type="checkbox"/> Dark bronze Painted	<input type="checkbox"/> Grey mix	<input type="checkbox"/> Brown Copper-red	<input type="checkbox"/> Walnut 360-70R	<input type="checkbox"/> Cherry red rough	<input type="checkbox"/> Chestnut 378-70R
<input type="checkbox"/> White 9010 matt	<input type="checkbox"/> Silver 9006 Painted	<input type="checkbox"/> Bronze Painted	<input type="checkbox"/> White 9010 soft	<input type="checkbox"/> Brown mix	<input type="checkbox"/> Walnut 102-70R	<input type="checkbox"/> Walnut 102-70R	<input type="checkbox"/> Cherry red natural	<input type="checkbox"/> Striped Douglas
<input type="checkbox"/> Grey 7001	<input type="checkbox"/> Grey 7016 anthracite	<input type="checkbox"/> Black 9005 matt	<input type="checkbox"/> Metallised iron grey	<input type="checkbox"/> Green mix	<input type="checkbox"/> Medium walnut natural	<input type="checkbox"/> Renolit clear	<input type="checkbox"/> Renolit white	<input type="checkbox"/> Not in stock
<input type="checkbox"/> Dark brown Painted	<input type="checkbox"/> Green 6005 matt				<input type="checkbox"/> Dark walnut natural	<input type="checkbox"/> Renolit dark		

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.

wrap-around line



wrap-around line

- 36 aries**
vertical with spring and brush
- 38 aries self block**
vertical with spring, brush and expansion fastening
- 40 laries**
lateral with spring and brush
- 42 aries / laries soft**
vertical/lateral with spring and controlled opening
- 44 caries**
vertical with spring-chain and brush
- 46 ara**
vertical with spring and windproof buttons
- 48 tara press up**
vertical with spring, windproof buttons and pressure opening
- 50 idra**
lateral with spring and windproof buttons
- 52 leo**
vertical with chain and windproof buttons
- 54 Piuma® v**
vertical with telescopic spring and anti-gust windproof system
- 56 Mega®**
lateral with windproof system and retractable mobile guide
- 58 scenipro**
lateral with retractable mobile guide
- 60 picoscenica**
lateral with retractable mobile guide and compact footprint
- 62 Oltre® V**
vertical with windproof zip for large dimensions
- 64 Oltre® L**
lateral and corner with windproof zip for large dimensions



FASTENING NET WITH CO-EXTRUDED SYSTEM

aries

Spring-loaded flyscreen with vertical winding and brush



STANDARD FEATURES 42

- Grey glass fibre net
- Net fastening with co-extruded system

STANDARD FEATURES 32

- Bettervue grey fibreglass net
- Fastening with iron clips

VARIANTS

Aries 42 with caps
Telescopic caps for offsetting

Aries 42 Press Up
Handle for pressure-controlled opening

Aries 32/42 Fast
Push-button handle

Aries front fastening
Set-up for front fastening


Special nets and fabrics on request

Fibreglass net ●●	Fabrinet ●●
Two-tone net	Bettervue net ●●
Lookout net	Tuffscreen net
Sunox antibacterial net	Darkening ●●●●
Anti-pollen net	Filtering ○●

Optional on request

Box fastening clip 42	Positioning template 42/32
Windproof brush 42/32	Guides 22 x 22 mm 42/32
Adjustable feet 42/32	Slow System 42/32

Rods and accessories

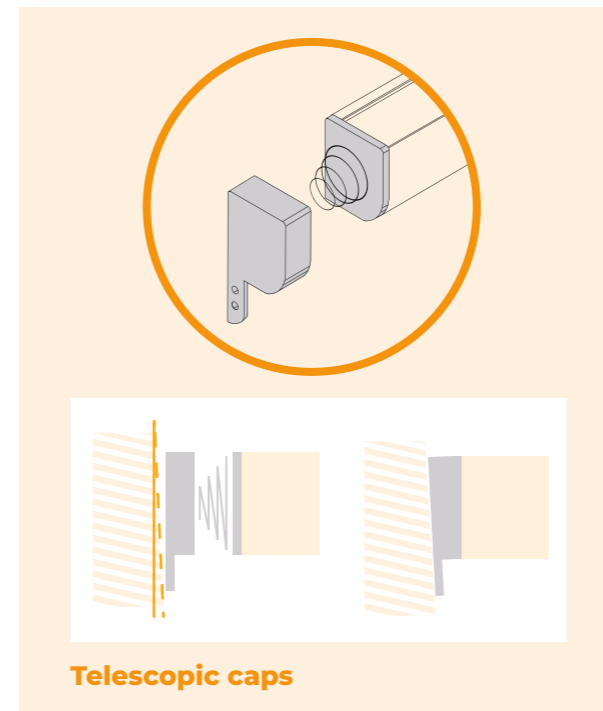

Telescopic caps




Aries front fastening
Set-up for front fastening



Aries Press UP
Pressure-assisted opening



Positioning template



Windproof brush



Adjustable feet



Aries Fast
Push-button handle opening

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will have the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.

Offsetting

In the version with caps max. 9 mm per side in width.


With adjustable feet max. 6 mm in height.

For the Aries 32 version, the exclusive use of the Bettervue net is recommended. In case of special requirements please contact the company.

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Aries 42	400	500	1600	2500
Aries 32	400	500	1600	1600

FOOTPRINT (mm)

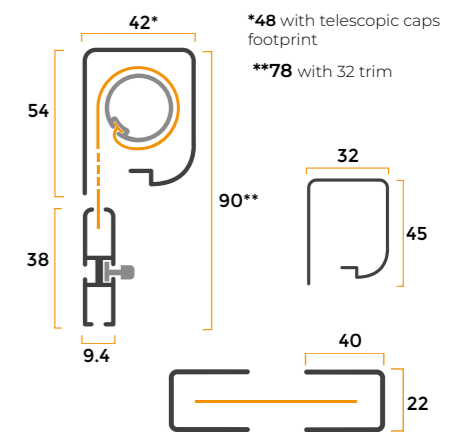

Aluminium Colours



White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix	Walnut 102-70R	Cherry red natural	Striped Douglas	
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix	Medium walnut natural	Renolit clear	Renolit white	
Dark brown Painted	Green 6005 matt				Dark walnut natural	Renolit dark		

Ral Raffaello Copper-red Wood / Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



FASTENING NET WITH CO-EXTRUDED SYSTEM

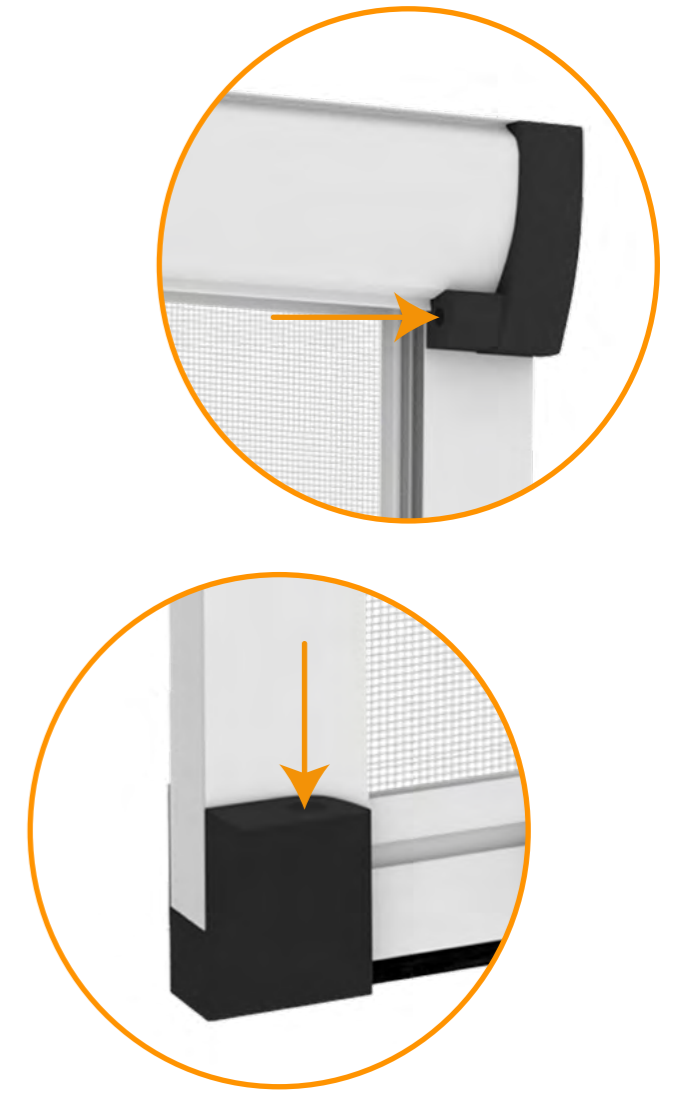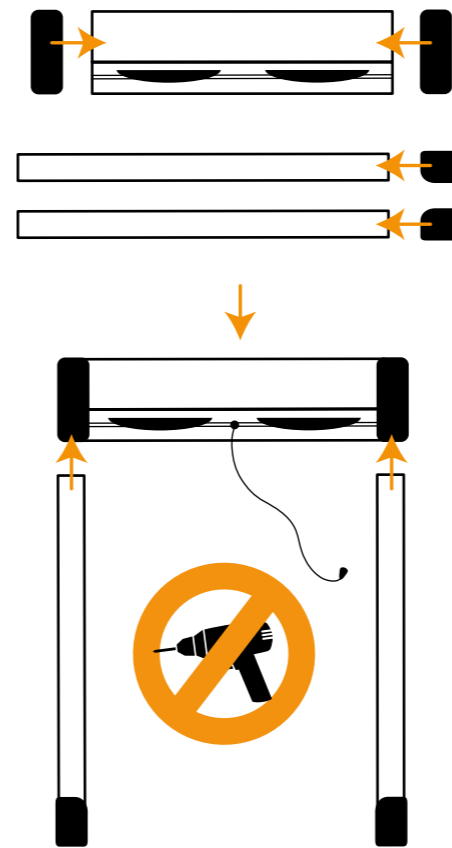

aries self block

Vertical flyscreen with spring brush and expansion fastening



STANDARD FEATURES

- Grey glass fibre net
- Lateral guides with brush
- Set-up for installation without holes

Special nets and fabrics on request

Fibreglass net ●●	Fabrinet ●●
Two-tone net	Bettervue net ●●
Lookout net	Tuffscreen net
Sunox antibacterial net	Darkening ●●●●●
Anti-pollen net	Filtering ○●

Optional on request

- Windproof brush
- Slow System
- Positioning template

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will have the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.


Offsetting

Max. 9 mm per side in width.
Max. 9 mm in height.

RECOMMENDED DIMENSIONS (in mm)

Aries Self Block	L/min	H/min	L/max	H/max
	400	500	1600	2500

FOOTPRINT (mm)

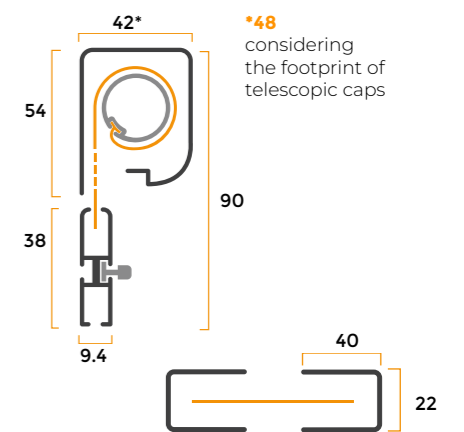

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix		Walnut 102-70R	Cherry red natural	Striped Douglas
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix		Medium walnut natural	Renolit clear	Renolit white
Dark brown Painted	Green 6005 matt					Dark walnut natural	Renolit dark	

Ral

Raffaello

Copper-red

Wood

/ Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



FASTENING NET WITH CO-EXTRUDED SYSTEM

Laries

Spring-loaded flyscreen with lateral winding with brush



STANDARD FEATURES 42

- Grey glass fibre net
- Net fastening with co-extruded system
- Box fastening clips

STANDARD FEATURES 32

- Bettervue Grey fibreglass net
- Fastening with iron clips

VARIANTS

Laries 42 with caps
Telescopic caps for offsetting

Laries 42/32 with hooks
Lock with hooks

Special nets and fabrics on request

- | | |
|-------------------------|------------------|
| Fibreglass net ●● | Fabrinet ●● |
| Two-tone net | Bettervue net ●● |
| Lookout net | Tuffscreen net |
| Sunox antibacterial net | Darkening ●●○●● |
| Anti-pollen net | Filtering ○●● |

Optional on request

- | | |
|-----------------------|-----------------------------|
| Clipless fastening 42 | Positioning template 42/32 |
| Windproof brush 42/32 | Reinforced handle bar 42/32 |
| Adjustable feet 42/32 | Slow System 42/32 |
| Power lift kit 42 | |


Rods and accessories



Laries double
Double door



Lock with hooks




Reinforced handle bar



Power lift kit with brush insert



Telescopic caps



Windproof brush

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will have the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.

Offsetting


In the version with caps max 9 mm in height. The spring is only applied to the top head

For the Laries 32 version, the exclusive use of the Bettervue net is recommended. If the case of special requirements, please contact the company.

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Laries 42	400	500	1600	2500
Laries 42 Double	800	500	3000	2500
Laries 32	400	500	1400	2300
Laries 32 Double	800	500	2600	2300

FOOTPRINT (mm)

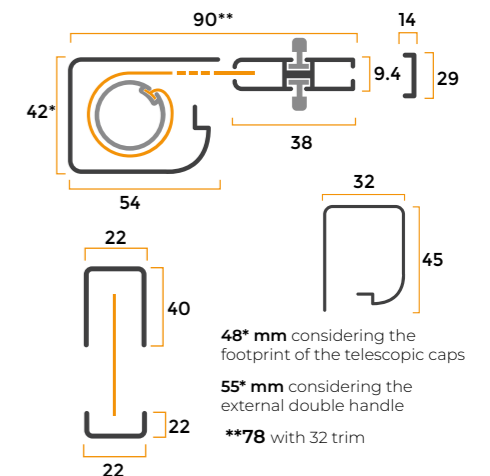

For double door versions, make sure that each door complies with the recommended single door dimensions. Specify off-centre opening when ordering, if desired. Unless otherwise specified, the flyscreen will be manufactured with the box on the left (inside view).

48* mm considering the footprint of the telescopic caps

55* mm considering the external double handle

**78 with 32 trim

Aluminium Colours

- | | | | | | | | | |
|--------------------|----------------------|-----------------|----------------------|-----------|------------------|-----------------------|--------------------|------------------|
| White 9010 | Ivory 1013 | Brown 8017 matt | Dark bronze Painted | Grey mix | Brown Copper-red | Walnut 360-70R | Cherry red rough | Chestnut 378-70R |
| White 9010 matt | Silver 9006 Painted | Bronze Painted | White 9010 soft | Brown mix | | Walnut 102-70R | Cherry red natural | Striped Douglas |
| Grey 7001 | Grey 7016 anthracite | Black 9005 matt | Metallised iron grey | Green mix | | Medium walnut natural | Renolit clear | Renolit white |
| Dark brown Painted | Green 6005 matt | | | | | Dark walnut natural | Renolit dark | |

Ral

Raffaello

Copper-red

Wood

Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



soft aries



FASTENING NET WITH CO-EXTRUDED SYSTEM



THE HANDLE BAR STOPS IN ANY POSITION



soft laries



THE HANDLE BAR STOPS IN ANY POSITION

aries/laries soft

Spring-loaded flyscreen with brush and controlled opening



STANDARD FEATURES

- Grey glass fibre net
- Guides with brush
- Net fastening with co-extruded system
- Handle bar stationary in any position
- Fastening clip for lateral box

Rods and accessories

Special nets and fabrics on request

- | | |
|-------------------------|------------------|
| Fibreglass net ●● | Fabrinet ●● |
| Two-tone net | Bettervue net ●● |
| Lookout net | Tuffscreen net |
| Sunox antibacterial net | Darkening ●●●●● |
| Anti-pollen net | Filtering ○● |

Optional on request

- Positioning template
- Windproof brush
- Box fastening clip for vertical system
- Lift kit for vertical system

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will have the same dimensions as those ordered (maximum footprint).


SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.

For a version with size 32 box, contact the company to assess feasibility.

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Aries Soft	400	500	1600	1600
Laries Soft	400	500	1400	2500
Laries Soft Double	800	500	2800	2500

FOOTPRINT (mm)

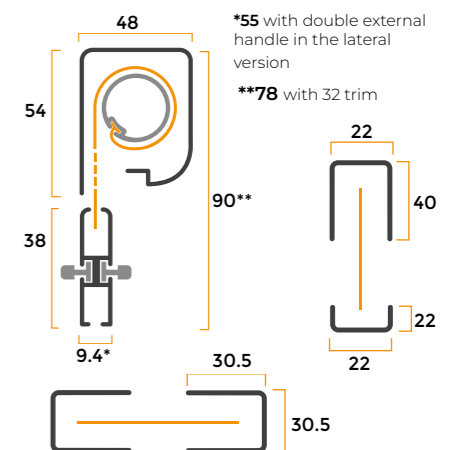

For double door versions, make sure that each door complies with the recommended single door dimensions. Specify off-centre opening when ordering, if desired. Unless otherwise specified, the flyscreen will be manufactured with the box on the left (inside view).

Aluminium Colours


White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix		Walnut 102-70R	Cherry red natural	Striped Douglas
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix		Medium walnut natural	Renolit clear	Renolit white
Dark brown Painted	Green 6005 matt					Dark walnut natural	Renolit dark	

/ Not in stock


! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.




FASTENING NET WITH CO-EXTRUDED SYSTEM

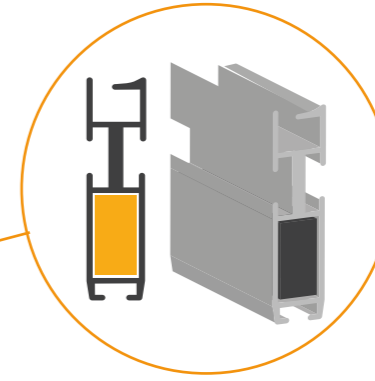

INTERNAL BALLAST SOLUTION

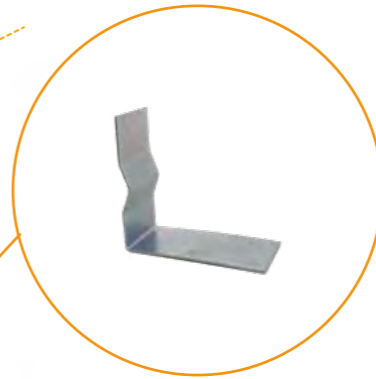

LOWER ATTACHMENT SOLUTION WITH MAGNET



Windproof brush

caries

Spring-chain winding flyscreen vertical winding and brush



STANDARD FEATURES

- Grey glass fibre net
- Spring - chain system
- Lateral guides with brush

Rods and accessories

Special nets and fabrics on request

- | | |
|-------------------------|------------------|
| Fibreglass net ●● | Fabrinet ●● |
| Two-tone net | Bettervue net ●● |
| Lookout net | Tuffscreen net |
| Sunox antibacterial net | Darkening ●●●●● |
| Anti-pollen net | Filtering ○● |

Optional on request

- Box fastening clips
- Windproof brush
- Positioning template
- Dual internal-external control

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will have the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.


Specify the side of the chain drive (inside view), if not specified it will be applied on the right hand side (inside view)

IMPORTANT! If the height is greater than the width in such a way that more weight is required to enable operation, an external **black** ballast will be applied.

RECOMMENDED DIMENSIONS (in mm)

Caries	L/min	H/min	L/max	H/max
	400	500	1600	2600

FOOTPRINT (mm)

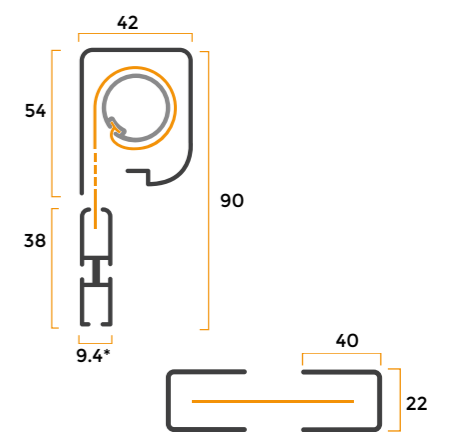

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix		Walnut 102-70R	Cherry red natural	Striped Douglas
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix		Medium walnut natural	Renolit clear	Renolit white
Dark brown Painted	Green 6005 matt					Dark walnut natural	Renolit dark	

Ral Raffaello Copper-red Wood

/ Not in stock


! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



FASTENING NET WITH CO-EXTRUDED SYSTEM



GUIDES WITH UPPER SLEEVES



WINDPROOF BUTTONS ON NET EDGE

ara

Spring-loaded flyscreen with vertical winding and buttons on the net edge



STANDARD FEATURES

Grey glass fibre net

Welded and riveted net

Windproof buttons at net edge

VARIANTS

Fara

Ratchet handle

Tara

Telescopic guides for mounting in openings slightly out-of-square


Special nets and fabrics on request

Fibreglass net ●●	Fabrinet ●●
Two-tone net	Bettervue net ●●
Lookout net	Tuffscreen net
Sunox antibacterial net	Darkening ●●●●●
Anti-pollen net	Filtering ○●


Optional on request

Fastening clip

Slow System

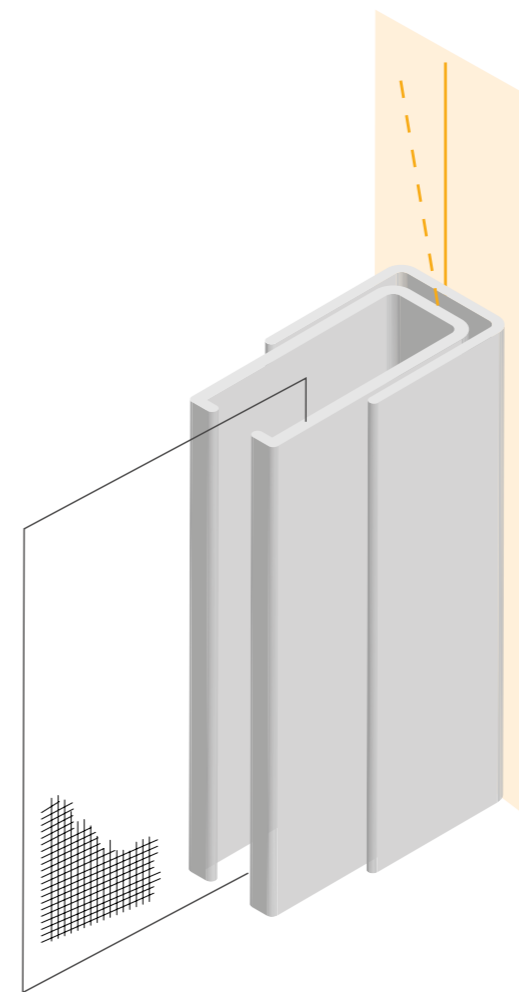

Telescopic system

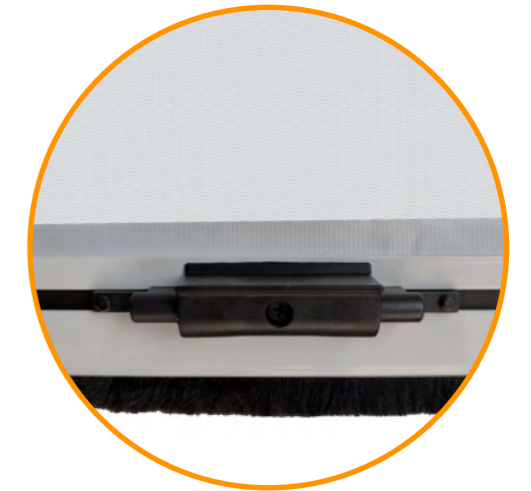

Push-button handle



Box fastening clips



Guide fastening clips

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

ARA SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.

TARA SPAN MEASUREMENT: the flyscreen will be supplied with 3 mm less on the guides and 6 mm less on the box than the opening dimensions.

Unless otherwise specified, the flyscreen will be manufactured with a 50 mm box.


RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Ara/Fara/Tara 50	400	500	1800	2600
Ara/Fara/Tara 40	400	500	1600	1400

Maximum dimensions that can be manufactured using fabrics filtering/darkening:

Ara 50: L/max 1500 mm - H/max 1700 mm
Ara 40: L/max 1500 mm - H/max 1200 mm

FOOTPRINT (mm)

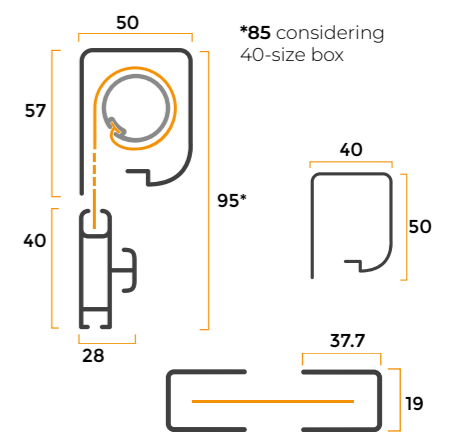

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix		Walnut 102-70R	Cherry red natural	Striped Douglas
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix		Medium walnut natural	Renolit clear	Renolit white
Dark brown Painted	Green 6005 matt					Dark walnut natural	Renolit dark	

Ral

Raffaello

Copper-red


Wood

Not in stock


! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



FASTENING NET WITH CO-EXTRUDED SYSTEM




WINDPROOF BUTTONS ON NET EDGE

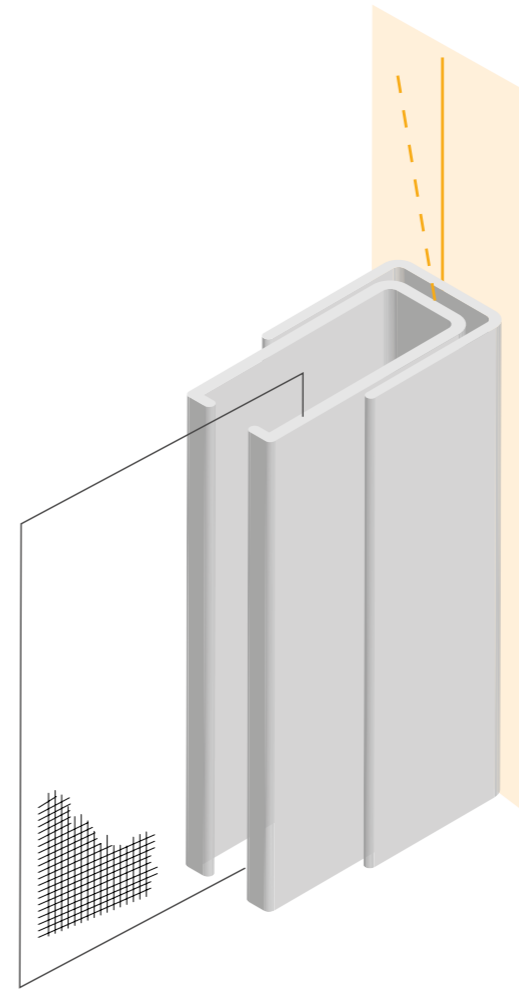

Telescopic system



PRESSURE-ASSISTED OPENING

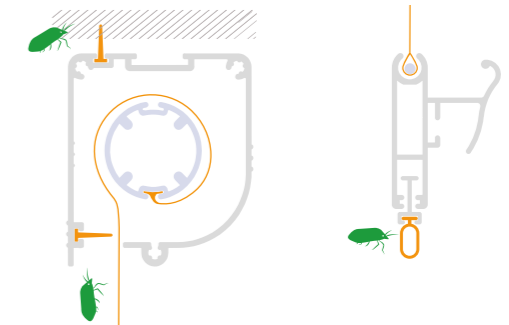

anti-bug kit



tara press up

Telescopic spring-loaded vertical winding flyscreen with buttons on the net edge and easy push-to-open opening



STANDARD FEATURES

- Grey glass fibre net
- Welded and riveted net
- Windproof buttons at net edge
- Easy opening with pressure system
- Telescopic guides
- Slow System

Special nets and fabrics on request

- | | |
|-------------------------|------------------|
| Fibreglass net ●● | Fabrinet ●● |
| Two-tone net | Bettervue net ●● |
| Lookout net | Tuffscreen net |
| Sunox antibacterial net | Darkening ●●●● |
| Anti-pollen net | Filtering ○● |

Optional on request

Fastening clip

Anti-bug kit

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 3 mm less on the height and 6 mm less on the width than the opening dimensions.

Unless otherwise specified, the flyscreen will be manufactured with a 50 mm box.


RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Tara Press Up 50	400	500	1800	2600
Tara Press Up 40	400	500	1600	1400

Maximum dimensions that can be manufactured using filtering/darkening fabrics:

Tara Press Up 50: L/max 1500 mm - H/max 1700 mm
Tara Press Up 40: L/max 1500 mm - H/max 1200 mm

FOOTPRINT (mm)

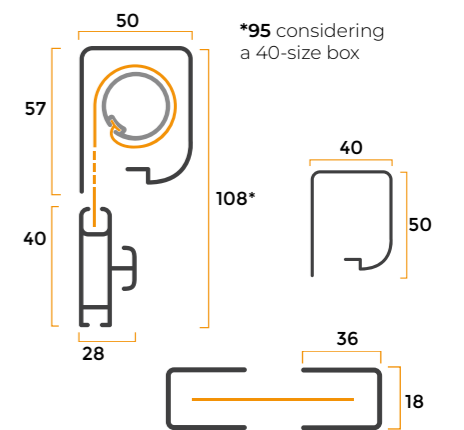

Aluminium Colours

- | | | | | | | | | |
|--------------------|----------------------|-----------------|----------------------|-----------|------------------|-----------------------|--------------------|------------------|
| White 9010 | Ivory 1013 | Brown 8017 matt | Dark bronze Painted | Grey mix | Brown Copper-red | Walnut 360-70R | Cherry red rough | Chestnut 378-70R |
| White 9010 matt | Silver 9006 Painted | Bronze Painted | White 9010 soft | Brown mix | | Walnut 102-70R | Cherry red natural | Striped Douglas |
| Grey 7001 | Grey 7016 anthracite | Black 9005 matt | Metallised iron grey | Green mix | | Medium walnut natural | Renolit clear | Renolit white |
| Dark brown Painted | Green 6005 matt | | | | | Dark walnut natural | Renolit dark | |

Ral

Raffaello

Copper-red

Wood

/ Not in stock


! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



FASTENING NET WITH CO-EXTRUDED SYSTEM



TOP GUIDE WITH SLEEVE



WINDPROOF BUTTONS ON NET EDGE

idra

Spring-loaded flyscreen with lateral winding and buttons on the net edge



STANDARD FEATURES

- Grey glass fibre net
- Welded and riveted net
- Windproof buttons at net edge

Special nets and fabrics on request			
<input type="checkbox"/> Fibreglass net	<input type="checkbox"/> Fabrinet	<input type="checkbox"/> Bettervue net	<input type="checkbox"/> Tuffscreen net
<input type="checkbox"/> Sunox antibacterial net	<input type="checkbox"/> Darkening	<input type="checkbox"/> Filtering	

VARIANTS


Tidra
Telescopic top guide for mounting in openings that are slightly out-of-square

Idra with hooks
Attachment with hooks


Optional on request	
<input type="checkbox"/> Anti-bug kit	
<input type="checkbox"/> Clip	
<input type="checkbox"/> Slow System	



eridano
Double door

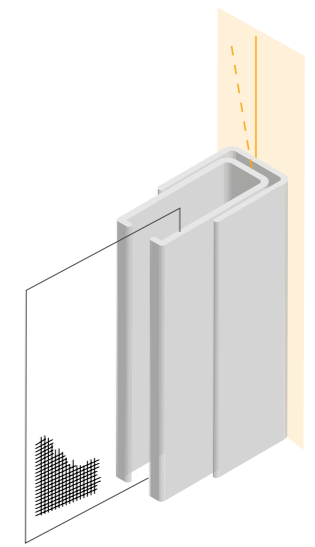

Telescopic system

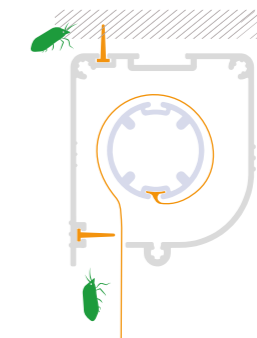

anti-bug kit



WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

IDRA SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.

TIDRA SPAN MEASUREMENT: the flyscreen will be supplied with 4 mm less on the base and height than the opening dimensions.

The low guide is supplied in silver colour as standard. For double door versions, make sure that each door complies with the recommended single door dimensions. Specify off-centre opening when ordering, if desired. Unless otherwise specified, the flyscreen will be manufactured with a 50-size box on the left hand side (inside view).

RECOMMENDED DIMENSIONS (in mm)				
Idra 50	L/min	H/min	L/max	H/max
	400	500	1600	2500
Eridano 50	L/min	H/min	L/max	H/max
	800	500	3200	2500
Idra 40	L/min	H/min	L/max	H/max
	400	500	1500	2500
Eridano 40	L/min	H/min	L/max	H/max
	800	500	3000	2500

Maximum dimensions that can be manufactured using fabrics filtering/darkening:

Idra 50: L/max 900 mm - H/max 2300 mm
Eridano 50: L/max 1800 mm - H/max 2300 mm
Idra 40: L/max 800 mm - H/max 2300 mm
Eridano 40: L/max 1600 mm - H/max 2300 mm

FOOTPRINT (mm)	
108**	14
50*	29
40	50
18.5	39
14	29

*53.7 considering the footprint of the caps
 **95 with 40-size box
 + 13 mm considering the double external handle

Aluminium Colours

Ral				Raffaello			Copper-red		Wood		
<input type="checkbox"/> White 9010	<input type="checkbox"/> Ivory 1013	<input type="checkbox"/> Brown 8017 matt	<input type="checkbox"/> Dark bronze Painted	<input type="checkbox"/> Grey mix	<input type="checkbox"/> Brown Copper-red	<input type="checkbox"/> Walnut 360-70R	<input type="checkbox"/> Cherry red rough	<input type="checkbox"/> Chestnut 378-70R			
<input type="checkbox"/> White 9010 matt	<input type="checkbox"/> Silver 9006 Painted	<input type="checkbox"/> Bronze Painted	<input type="checkbox"/> White 9010 soft	<input type="checkbox"/> Brown mix	<input type="checkbox"/> Walnut 102-70R	<input type="checkbox"/> Walnut 102-70R	<input type="checkbox"/> Cherry red natural	<input type="checkbox"/> Striped Douglas			
<input type="checkbox"/> Grey 7001	<input type="checkbox"/> Grey 7016 anthracite	<input type="checkbox"/> Black 9005 matt	<input type="checkbox"/> Metallised iron grey	<input type="checkbox"/> Green mix	<input type="checkbox"/> Medium walnut natural	<input type="checkbox"/> Dark walnut natural	<input type="checkbox"/> Renolit clear	<input type="checkbox"/> Renolit white			
<input type="checkbox"/> Dark brown Painted	<input type="checkbox"/> Green 6005 matt				<input type="checkbox"/> Dark walnut natural	<input type="checkbox"/> Renolit dark					


! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



FASTENING NET WITH CO-EXTRUDED SYSTEM



GUIDES WITH UPPER SLEEVES



WINDPROOF BUTTONS ON NET EDGE

leo

vertical winding chain flyscreen with buttons on the net edge



STANDARD FEATURES

Grey glass fibre net

Welded and riveted net

Windproof buttons at net edge

VARIANTS

Leo T

Telescopic guides for mounting in openings slightly out-of-square


Special nets and fabrics on request

Fibreglass net ●●	Fabrinet ●●
Two-tone net	Bettervue net ●●
Lookout net	Tuffscreen net
Sunox antibacterial net	Darkening ●●●●●
Anti-pollen net	Filtering ○●

Optional on request

Dual external control

Fastening clips

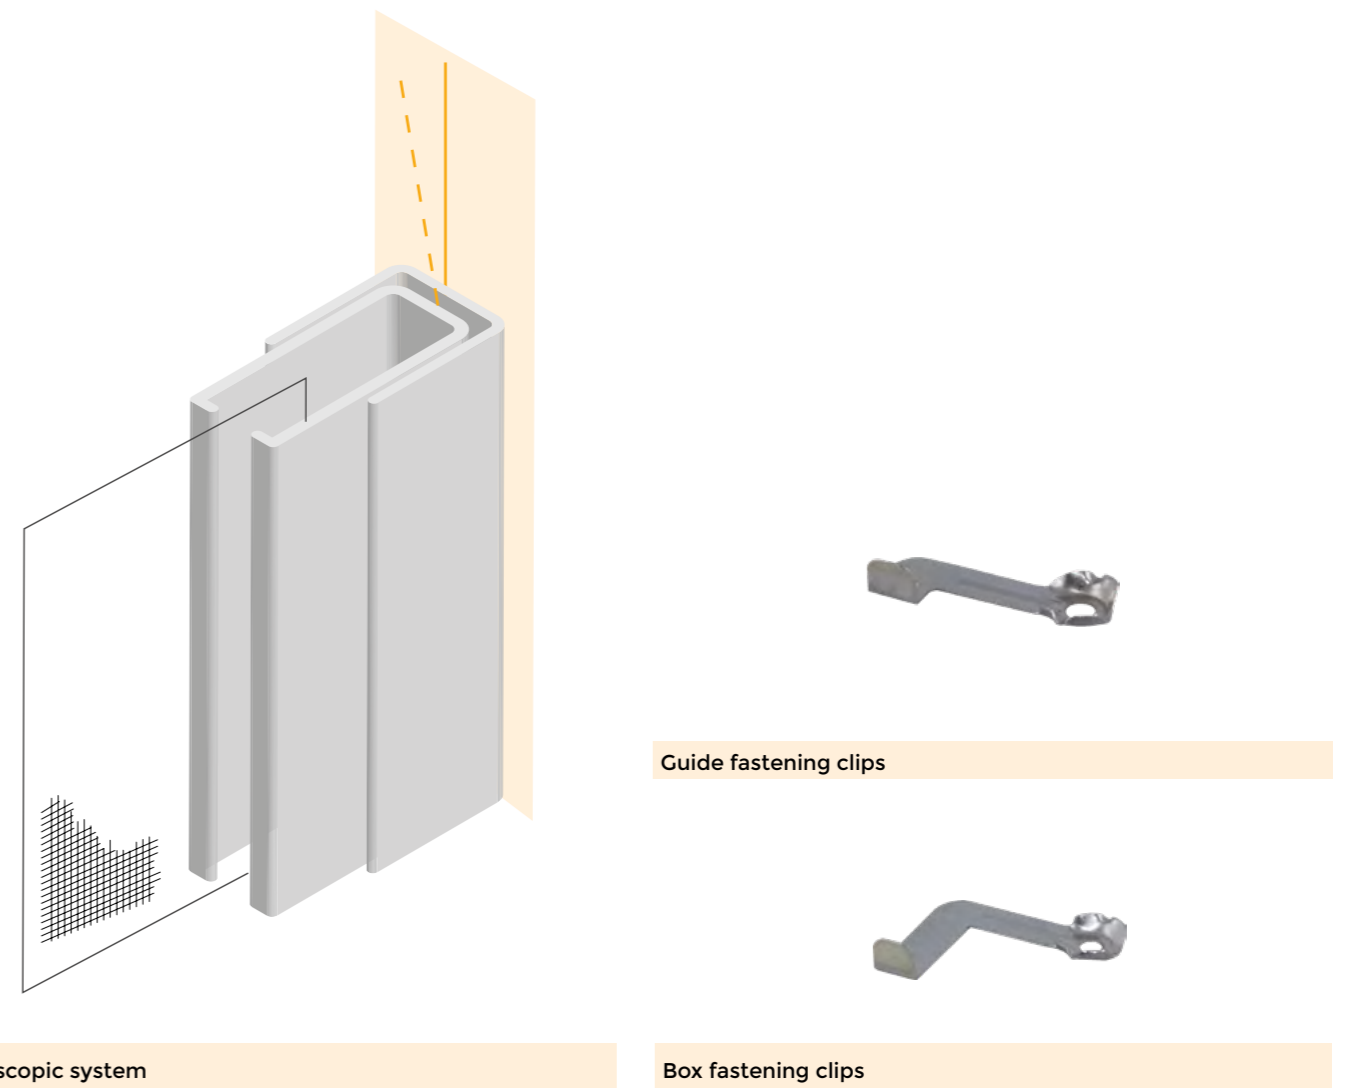

Telescopic system

Guide fastening clips

Box fastening clips

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.

Specify the side of the chain drive (inside view), if not specified it will be applied on the right hand side.

RECOMMENDED DIMENSIONS (in mm)

Leo	L/min	H/min	L/max	H/max
	400	500	1600	2600


Maximum sizes that can be manufactured using darkening fabrics:

Leo: L/max 1500 mm - H/max 2200 mm

Maximum sizes that can be manufactured with filtering fabrics:

Leo: L/max 1500 mm - H/max 1800 mm

FOOTPRINT (mm)

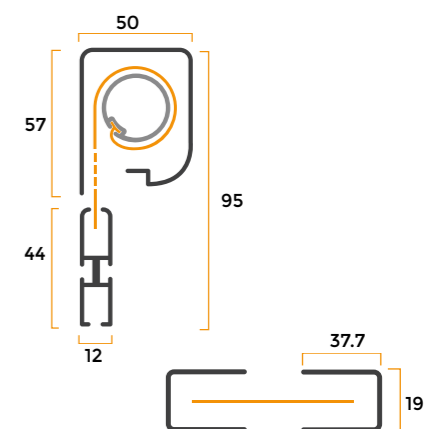

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix		Walnut 102-70R	Cherry red natural	Striped Douglas
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix		Medium walnut natural	Renolit clear	Renolit white
Dark brown Painted	Green 6005 matt					Dark walnut natural	Renolit dark	

Ral

Raffaello

Copper-red

Wood

Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



Telescopic spring-loaded flyscreen with vertical winding and windproof system



STANDARD FEATURES


- Bettervue high visibility black net
- Windproof system *anti-gust*
- Telescopic guides
- Slow System
- Easy opening with pressure system

Special nets and fabrics on request

Bettervue net

Optional on request

- Box fastening clips
- anti-bug kit

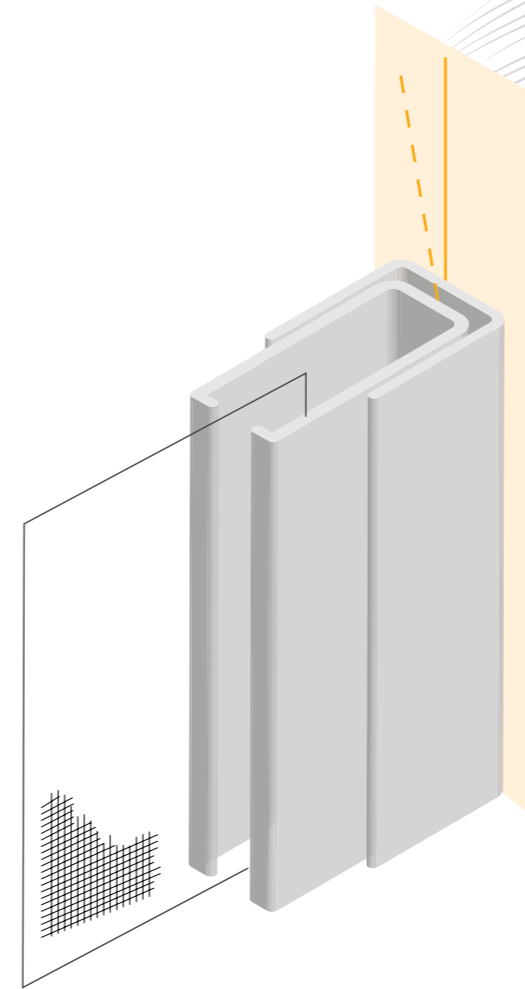

Telescopic system

Anti-gust windproof system

Telescopic lateral guides and high-visibility net combined in an anti-gust system designed and tested to withstand wind.



Box fastening clips

TOP PRODUCT


WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 3 mm less on the height and 6 mm less on the width than the opening dimensions.

RECOMMENDED DIMENSIONS (in mm)				
Piuma® V	L/min	H/min	L/max	H/max
	400	500	1500	1400

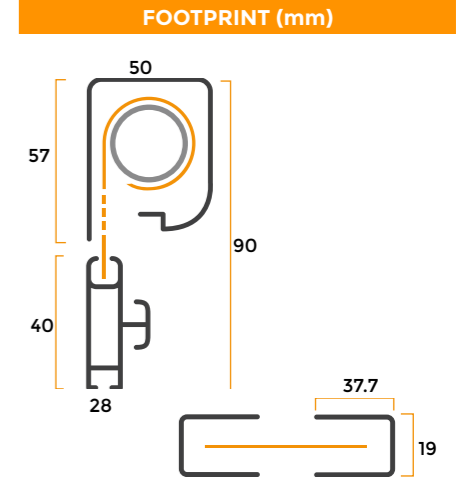

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix		Walnut 102-70R	Cherry red natural	Striped Douglas
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix		Medium walnut natural	Renolit clear	Renolit white
Dark brown Painted	Green 6005 matt					Dark walnut natural	Renolit dark	

Ral Raffaello Copper-red Wood

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



NO BARRIER



FASTENING NET WITH CO-EXTRUDED SYSTEM



Brushed tracks



Windproof system net No Out



Controlled lateral winding windproof flyscreen with retractable mobile guide



STANDARD FEATURES

- Grey glass fibre net
- Wind brush in the tracks
- Walk-on floor guide in PVC
- Profiles with magnetic attachment
- Handle bar stationary in any position
- No Out net windproof system

Special nets and fabrics on request

- Fibreglass net ●●
- Two-tone net ●●
- Lookout net ●●
- Sunox antibacterial net ●●●●
- Anti-pollen net ●●
- Fabrinet ●●
- Bettervue net ●●
- Tuffscreen net ●●
- Darkening ●●●●
- Filtering ●●

Optional on request

- Compatible recessed profiles
- Leather handle
- Installation with double-sided adhesive tape



Mega® Double Double door



Misaligned net

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will have the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.


White accessories

supplied as standard on aluminium colours White 9010.

RECOMMENDED DIMENSIONS (in mm)


	L/min	H/min	L/max	H/max
Mega®	400	500	2000	3000
Mega® Double	800	500	4000	3000

FOOTPRINT (mm)



IMPORTANT! The height must exceed the width by at least 10 cm.

For double door versions, also make sure that each door meets the recommended single door dimensions; specify off-centre opening when ordering, if desired.

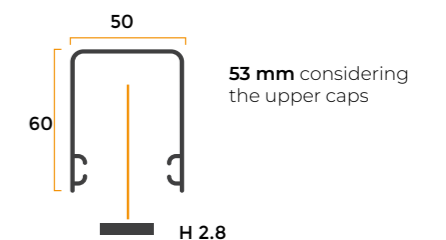

Aluminium Colours

- White 9010
- Ivory 1013
- Brown 8017 matt
- Dark bronze Painted
- Grey mix
- Brown Copper-red
- Walnut 360-70R
- Cherry red rough
- Chestnut 378-70R
- White 9010 matt
- Silver 9006 Painted
- Bronze Painted
- White 9010 soft
- Brown mix
- Walnut 102-70R
- Cherry red natural
- Striped Douglas
- Grey 7001
- Grey 7016 anthracite
- Black 9005 matt
- Metallised iron grey
- Green mix
- Medium walnut natural
- Renolit clear
- Renolit white
- Dark brown Painted
- Green 6005 matt
- Dark walnut natural
- Renolit dark

Ral Raffaello Copper-red Wood / Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



NO
BARRIER



FASTENING NET
WITH
CO-EXTRUDED
SYSTEM

scenipro

Controlled lateral winding flyscreen with retractable mobile guide



STANDARD FEATURES

Fibreglass net
No bottom rail and locking profile
Box with 45° brush
Handle bar stationary in any position
Guides with windproof system
Retractable guide with fluorescent insert
Out-of-square offset

VARIANTS

Installation with double-sided adhesive tape
Front installation (the kit supplied also allows front installation)

Special nets and fabrics on request

Fibreglass net	●●	Fabrinet	●●
Two-tone net		Bettervue net	●●
Lookout net		Tuffscreen net	
Sunox antibacterial net		Darkening	●●●●
Anti-pollen net		Filtering	○●

Optional on request

Double-sided adhesive striker
Floor guide with double-sided adhesive tape
Leather handle
Compatible recessed profiles



Scenipro Double
Double door



Misaligned net

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 3 mm less on the base and height than the opening dimensions.

Offsets



-3 mm / + 12 mm in height and max. 7 mm in width.

With max. striker 15 mm in width.

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Scenipro	400	500	2000	3000
Scenipro Double	800	500	4000	3000

FOOTPRINT (mm)

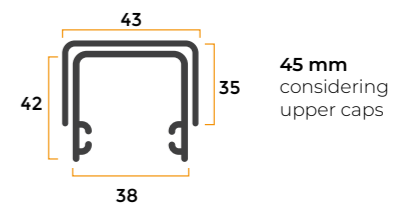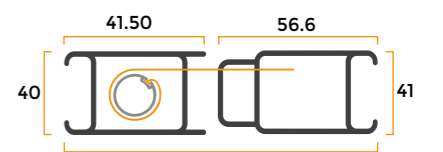

IMPORTANT! The height must always exceed by 8 cm the width.

For double door versions, also make sure that each door meets the recommended single door dimensions; specify off-centre opening when ordering, if desired.

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix		Walnut 102-70R	Cherry red natural	Striped Douglas
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix		Medium walnut natural	Renolit clear	Renolit white
Dark brown Painted	Green 6005 matt					Dark walnut natural	Renolit dark	

Ral

Raffaello

Copper-red

Wood

Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



NO BARRIER



picoscenica double
Double door

picoscenica

Controlled lateral winding flyscreen with retractable guide and compact footprint



STANDARD FEATURES

- Bettervue Grey fibreglass net
- No bottom rail and locking profile
- Handle bar stationary in any position
- Guides with windproof system
- Retractable guide with fluorescent insert
- Out-of-square offset

VARIANTS

Installation with double-sided adhesive tape

Special nets and fabrics on request

Bettervue net

Optional on request

- Double-sided adhesive striker
- Floor guide with double-sided adhesive tape
- Wall-flush gaskets for out-of-square offsetting
- Leather handle

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 3 mm less on the base and height than the opening dimensions.


Offsets

-3 mm /+ 12 mm in height and max. 7 mm in width. With max. striker of 15 mm in width.

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Picoscenica	400	500	1380	2800
Picoscenica Double	800	500	2760	2800

FOOTPRINT (mm)

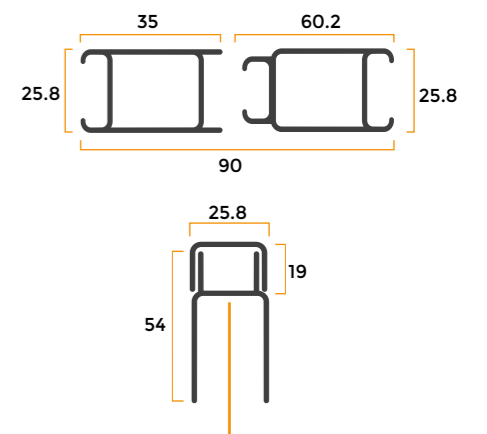



IMPORTANT! The height must always exceed the width by 10 cm.

For double door versions, also make sure that each door meets the recommended single door dimensions; specify off-centre opening when ordering, if desired.


Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R	Not in stock
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix		Walnut 102-70R	Cherry red natural	Striped Douglas	
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix		Medium walnut natural	Renolit clear	Renolit white	
Dark brown Painted	Green 6005 matt					Dark walnut natural	Renolit dark		
Ral			Raffaello		Copper-red		Wood		

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.

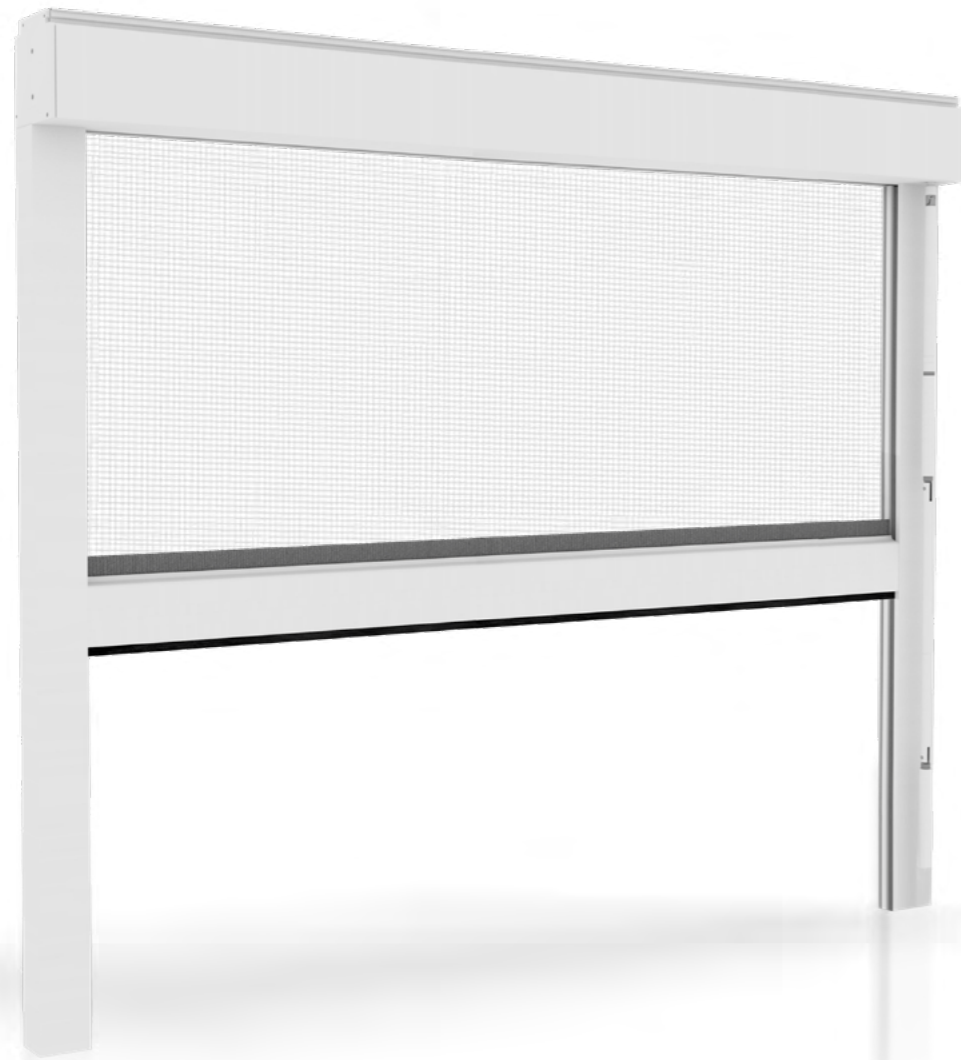


Windproof zip

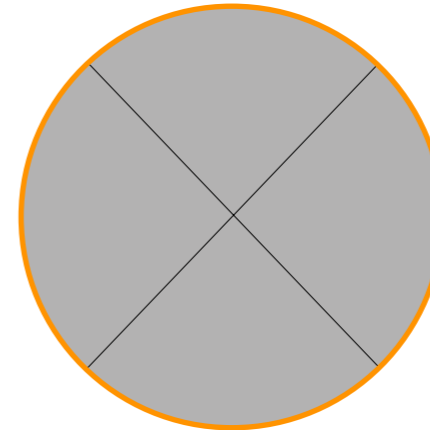


Welded windproof zip and PVC insert




anti-bending springs




Cristal PVC



Tuffscreen Fabrinet



Darkening



Filtering

TOP
PRODUCT

OLTRE® V

Vertical flyscreen with windproof zip for large dimensions



STANDARD FEATURES

- Ultra-durable Tuffscreen net
- Self-supporting
- Easy installation
- Welded windproof zip
- Ceiling box fastening brackets
- Openable box 103
- anti-bending springs

VARIANTS

- Winch
- Motor

Special nets and fabrics on request

- Fabrinet
- Darkening
- Cristal
- Filtering

Optional on request

- Mechanical motor
- Radio-controlled motor
- 5-channel radio-control
- 16-channel radio-control

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.


Specify motor side or winch side. In information is not provided, the installation side of the winch or motor will be the right hand side

In case of motorised version specify the type of motor.

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Over® V 83 winch	600	700	2800	2400
Over® V 83 motor	670	700	2800	2400
Over® V 103 winch	600	700	4500	3000
Over® V 103 motor	820	700	4500	3000

FOOTPRINT (mm)

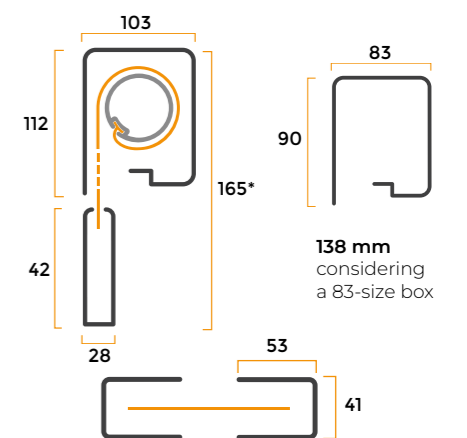

Aluminium Colours

- | | | | | | | | | |
|---|---|--|---|------------------------------------|--|---|---|---|
| <input type="checkbox"/> White 9010 | <input type="checkbox"/> Ivory 1013 | <input type="checkbox"/> Brown 8017 matt | <input type="checkbox"/> Dark bronze Painted | <input type="checkbox"/> Grey mix | <input type="checkbox"/> Brown Copper-red | <input type="checkbox"/> Walnut 360-70R | <input type="checkbox"/> Cherry red rough | <input type="checkbox"/> Chestnut 378-70R |
| <input type="checkbox"/> White 9010 matt | <input type="checkbox"/> Silver 9006 Painted | <input type="checkbox"/> Bronze Painted | <input type="checkbox"/> White 9010 soft | <input type="checkbox"/> Brown mix | <input type="checkbox"/> Walnut 102-70R | <input type="checkbox"/> Cherry red natural | <input type="checkbox"/> Striped Douglas | <input type="checkbox"/> Not in stock |
| <input type="checkbox"/> Grey 7001 | <input type="checkbox"/> Grey 7016 anthracite | <input type="checkbox"/> Black 9005 matt | <input type="checkbox"/> Metallised iron grey | <input type="checkbox"/> Green mix | <input type="checkbox"/> Medium walnut natural | <input type="checkbox"/> Renolit clear | <input type="checkbox"/> Renolit white | |
| <input type="checkbox"/> Dark brown Painted | <input type="checkbox"/> Green 6005 matt | | | | <input type="checkbox"/> Dark walnut natural | <input type="checkbox"/> Renolit dark | | |

Ral Raffaello Copper-red Wood


! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.

recessed systems




recessed systems

- 68 recessed kit**
recessed kits and solutions
- 72 apus**
vertical and lateral spring-loaded flyscreens with brush and recessed kit
- 74 lince**
vertical and lateral spring-loaded flyscreen with windproof buttons and recessed kit
- 76 auriga**
vertical and lateral spring-loaded flyscreen with recessed brush
- 78 moon**
vertical spring-loaded flyscreen with recessed windproof buttons
- 79 perseo**
vertical chain flyscreen with recessed windproof buttons
- 80 aquila**
Lateral spring-loaded flyscreen with recessed windproof buttons
- 82 recessed Mega®**
recessed systems for Mega®
- 84 recessed scenipro**
recessed systems for scenipro
- 85 recessed plissè**
recessed systems for plissè
- 86 recessed Colomba**
recessed systems for Colomba

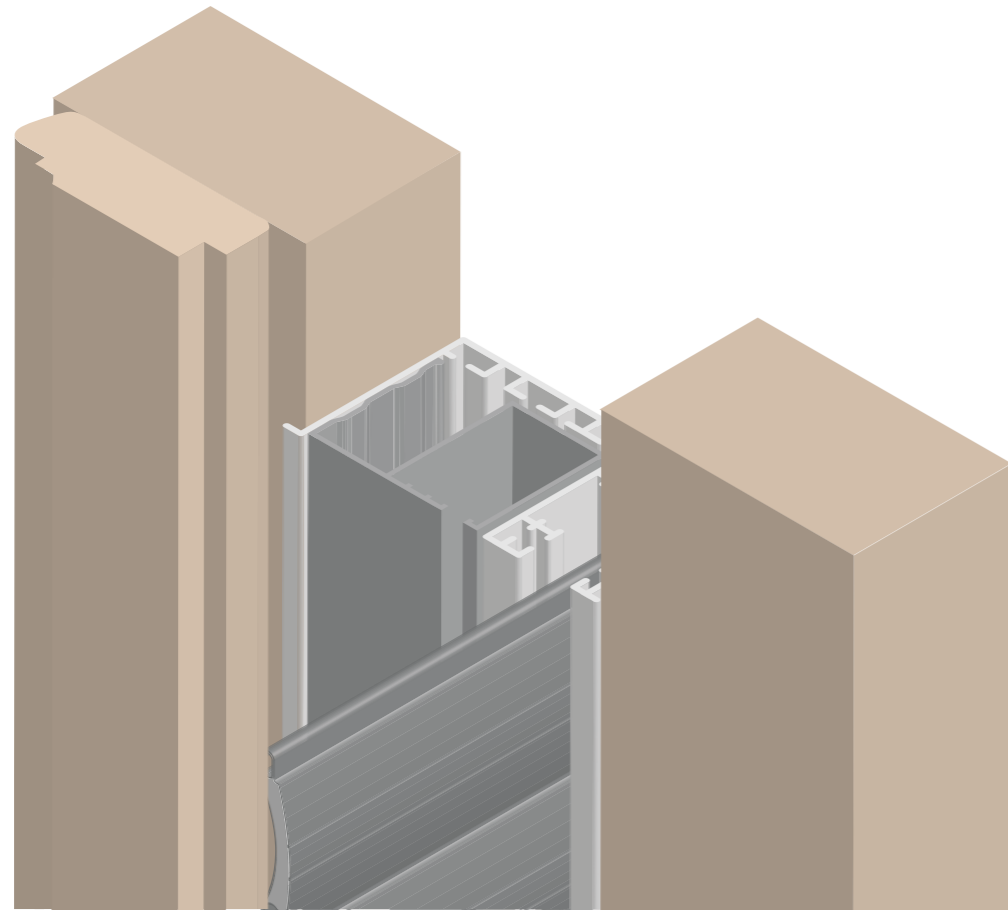



The main feature that differentiates them from other products is both practical and aesthetic. The flyscreen profiles are recessed within the walls that form the perimeter of the opening and this is why they are also called retractable flyscreens. In this manner, the profiles are concealed and there is perfect integration with roller shutters and blinds.


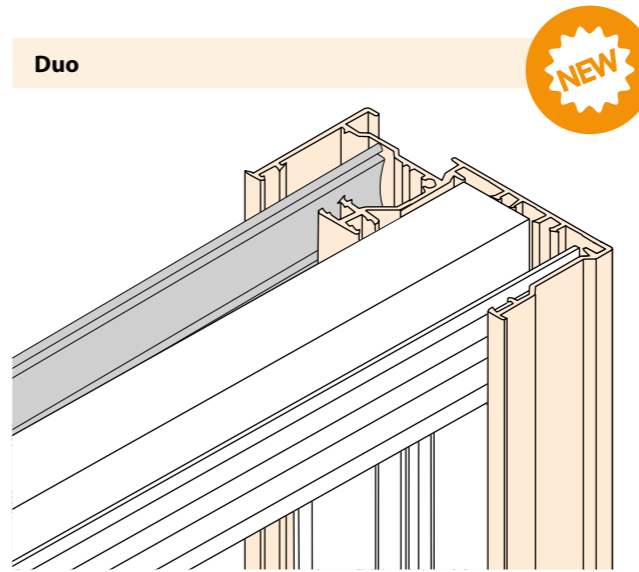
Below is a list of available recessed profiles.



One-piece flyscreen and roller shutter kit with magnet and/or brush inserts supplied with accessories



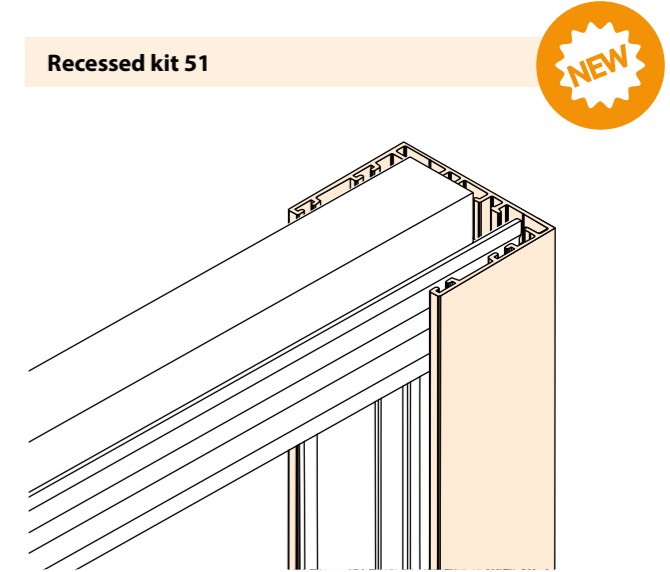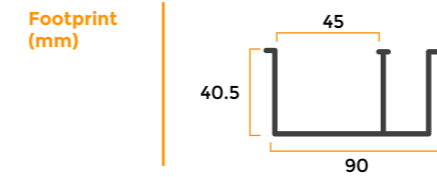


Colours available in stock




 White 9010	 Brown 8017 matt	 Renolit clear
 Ivory 1013	 Renolit dark	



Recessed kit with magnet inserts and/or brush with accessories



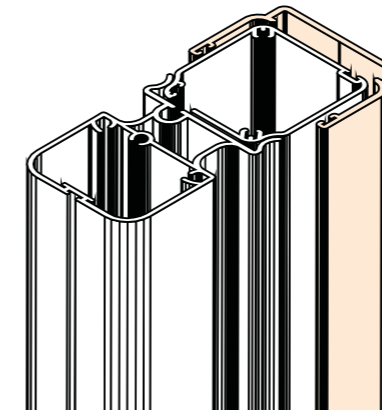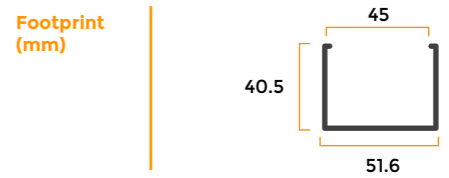


Colours available in stock



 White 9010	 Brown 8017 matt	 Renolit clear
 Ivory 1013	 Renolit dark	



Specific recessed kit for Scenipro model

Colours available in stock

 White 9010	 Brown 8017 matt	 Renolit clear
 Ivory 1013	 Renolit dark	

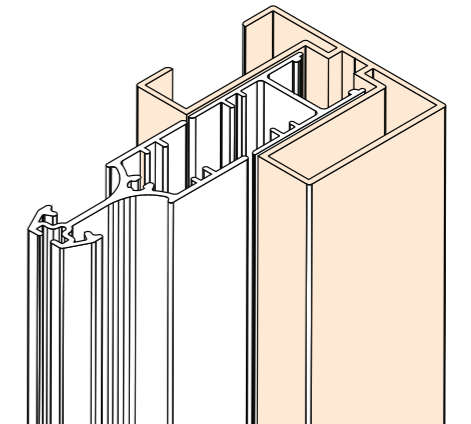


Adapter guide for Colomba - Sincropliss profiles for use alone or in combination with other recessed kits.

Colours available in stock


 White 9010
--




Ghost

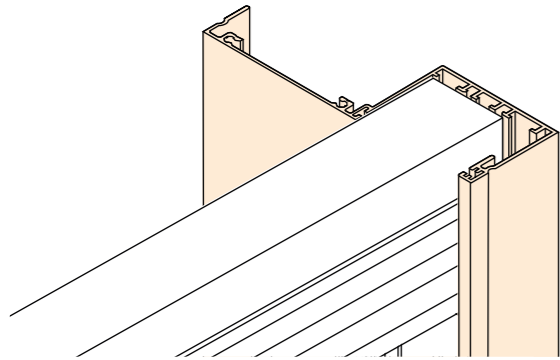

Recessed kit with spacer suitable for windows fitted with shutters

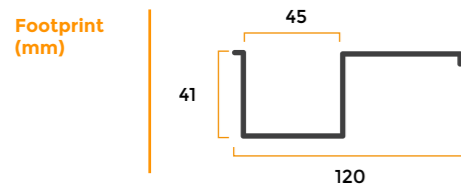

Carter



Closing profile for use when the flyscreen installation is not to be completed



The flyscreen and guides can be ordered separately

Full Flyscreen with recessed kit


The flyscreen model will be supplied with the chosen kit plus accessories (if applicable).

A (flyscreen only)

The chosen flyscreen model will be supplied ready for recessed mounting, but without a recessed kit. In the case of version A, it is advisable to specify which recessed kit set-up is preferred or whether guides are already in use.

B (recessed kit only)

Only the chosen kit with recessed set-up plus accessories (if applicable) will be supplied. If known, you should specify for which model of flyscreen you wish to set up the recessed system.

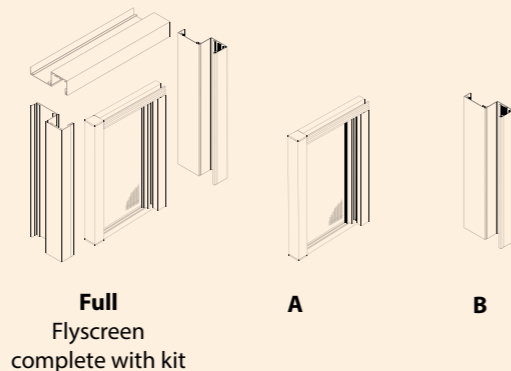

Flyscreens with recessed kit of your choice

Product	Type	recessed kit	Box	Orientations
Apus Full Duo	brush	Duo	45	V - L - Double
Apus Full Ghost	brush	Ghost	45	V - L - Double
Apus Full 51	brush	51	45	V - L - Double
Lince Full Duo	Buttons	Duo	45	V - L - Double
Lince Full Ghost	Buttons	Ghost	45	V - L - Double
Lince Full 51	Buttons	51	45	V - L - Double

Only flyscreens set-up for the recessed kit, supplied without kit (if known, please specify which recessed kit you wish to set-up or if guides are already in use)

Product	Type	Box	Orientations
Apus A Duo	brush	45	V - L - Double
Apus A Ghost	brush	45	V - L - Double
Apus A 51	brush	45	V - L - Double
Lince A Duo	Buttons	45	V - L - Double
Lince A Ghost	Buttons	45	V - L - Double
Lince A 51	Buttons	45	V - L - Double

Recessed kit only (specify, if known, for which flyscreen model you wish the set-up of the recessed system)

Product	recessed kit
Apus B Duo	Duo
Apus B Ghost	Ghost
Apus B 51	51
Lince B Duo	Duo
Lince B Ghost	Ghost
Lince B 51	51

Flyscreens with retractable box

Product	recessed type	Box	Types	
Auriga	brush	retractable box	45	V - L - Double
Moon	Buttons	retractable box	45 - 50	V
Perseo	Buttons	retractable box	50	V catena
Aquila	Buttons	retractable box	45 - 50	L - Double

Please refer to the product datasheets on the following pages for details and optional accessories as well as other flyscreen models that are compatible with recessed installation.



FASTENING NET WITH CO-EXTRUDED SYSTEM



Lapus



Lapus Double

apus

Spring-loaded flyscreen with brush and set-up recessed kit

STANDARD FEATURES

- Grey glass fibre net
- retractable box
- Guides with brush

VARIANTS

Fast
Ratchet opening for vertical system

Apus V Press UP
Pressure-assisted opening for vertical system



Special nets and fabrics on request



- | | |
|-------------------------|------------------|
| Fibreglass net ●● | Fabrinet ●● |
| Two-tone net | Bettervue net ●● |
| Lookout net | Tuffscreen net |
| Sunox antibacterial net | Darkening ●●●●● |
| Anti-pollen net | Filtering ○● |

Optional on request



- Aluminium crankcase
- Slow System

Set-up for recessed system



Flyscreen with Duo recessed kit

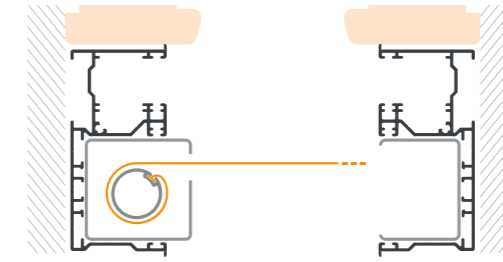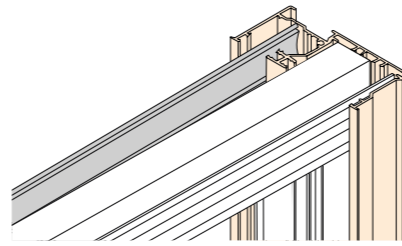

Ghost flyscreen with recessed kit

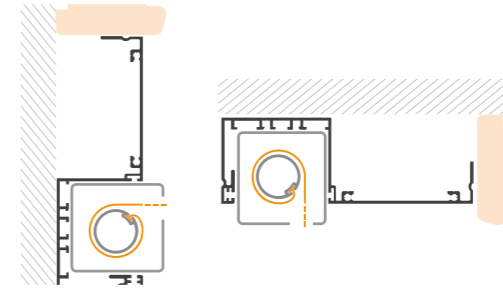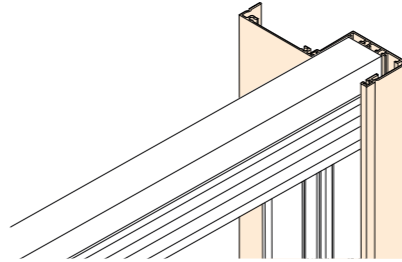

Flyscreen with recessed kit 51

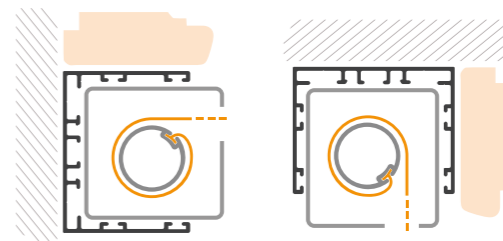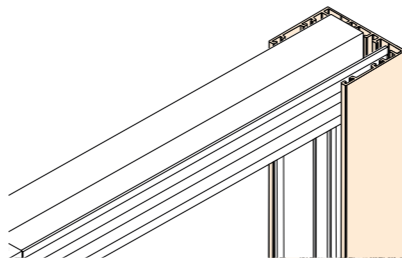

The flyscreen and guides can be ordered separately

Apus Full with recessed kit

The flyscreen model Apus (Apus, Lapus or Lapus Double) will be supplied with the chosen kit with set-up for recessed system and accessories (if applicable).
E.g. to order a Lapus flyscreen with Duo recessed kit, write **Lapus Full Duo** + specify the type of recessed guides are in use.

Apus A (flyscreen only)
The flyscreen model Apus (Apus, Lapus or Lapus Double) set-up for recessed installation will be supplied without a recessed kit.
E.g. to order only the Apus flyscreen write **Apus-A Duo**.

Apus B (recessed kit only)
Only the chosen kit with recessed set-up plus accessories (if applicable) for the chosen Apus model (V, L or Double) will be supplied.
E.g. to order only the Duo recessed kit set-up for Apus, write **Apus-B Duo**.

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: The flyscreen will be delivered with the same dimensions as ordered (maximum footprint).

APUS DUO SPAN MEASUREMENT: the flyscreen will be supplied with increased dimensions in width + 82 mm (41x2) and height equal to the span measurement.

APUS GHOST SPAN MEASUREMENT: the flyscreen will be supplied with increased dimensions in width + 82 mm (41x2) and height + 41 mm.

APUS 51 SPAN MEASUREMENT: the flyscreen will be supplied with increased dimensions in width + 82 mm (41x2) and height + 41 mm.

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Apus	400	500	1600	2500
Lapus	400	500	1400	2600
Lapus Double	800	500	2800	2600

For double door versions, make sure that each door complies with the recommended single door dimensions. Specify off-centre opening when ordering, if desired. Unless otherwise specified, the flyscreen will be manufactured with the box on the left (inside view).

Specify box position when ordering


- LEFT: box on the left (inside view)
- RIGHT: box on the right (inside view)

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix		Walnut 102-70R	Cherry red natural	Striped Douglas
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix		Medium walnut natural	Renolit clear	Renolit white
Dark brown Painted	Green 6005 matt					Dark walnut natural	Renolit dark	

Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested. For the stock colours of the recessed profiles please refer to the dedicated pages.

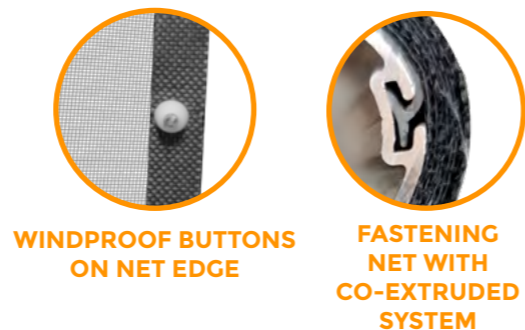

WINDPROOF BUTTONS ON NET EDGE

FASTENING NET WITH CO-EXTRUDED SYSTEM



Lince L



Lince L Double

lince

Spring-loaded flyscreen with windproof buttons and set-up recessed kit



STANDARD FEATURES

- Welded and riveted grey glass fibre net
- retractable box
- Windproof buttons at net edge



VARIANTS

Fast Ratchet opening for vertical system



Special nets and fabrics on request			
Fibreglass net ●●	Fabrinet ●●	Two-tone net ●●	Bettervue net ●●
Lookout net	Tuffscreen net	Sunox antibacterial net ●●●●●	Darkening ●●●●●
Anti-pollen net ●●	Filtering ●●	Optional on request	
Aluminium crankcase			
Slow System			

Set-up for recessed system



Flyscreen with Duo recessed kit

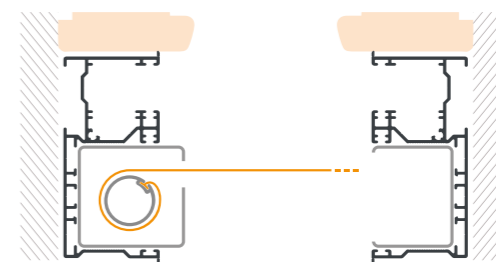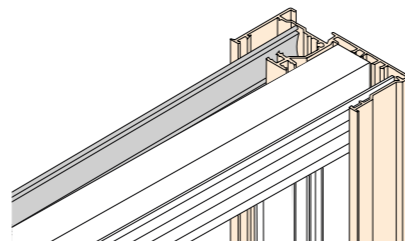

Ghost flyscreen with recessed kit

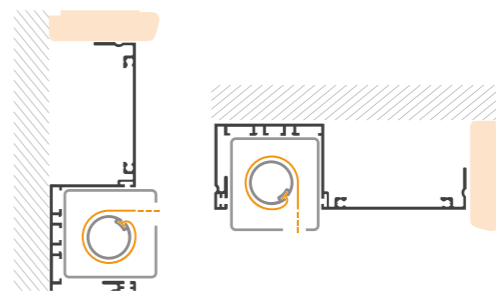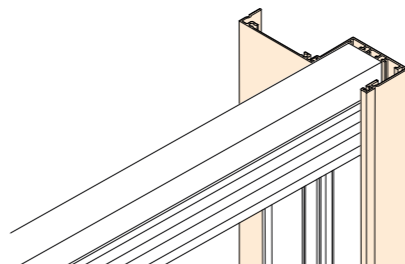

Flyscreen with recessed kit 51

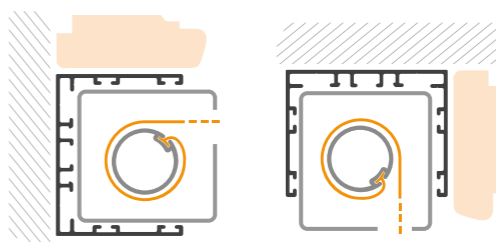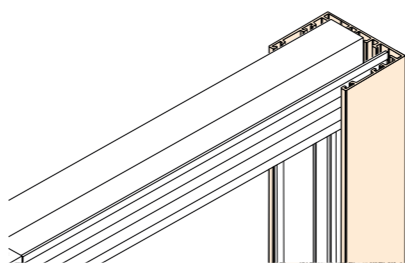

The flyscreen and guides can be ordered separately

Lince Full with recessed kit

It will be supplied with the chosen Lince model (V, L or Double) with the chosen kit set-up for recessed installation plus accessories (if applicable). **E.g. to order a Lince lateral flyscreen with Duo recessed kit, write Lince L Full Duo.**

Lince A (flyscreen only) Only the Lince (V, L or Double) flyscreen model chosen will be supplied without a recessed kit. **E.g. to order only a vertical Lince flyscreen write Lince V-A + specify the type of recessed guides in use.**

Lince B (recessed kit only) Only the chosen recessed kit plus accessories (if any) for the chosen Lince model (V, L or Double) will be supplied. **E.g. to order only the Duo recessed kit set-up for vertical Lince, write Lince V-B Duo.**

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: The flyscreen will be delivered with the same dimensions as ordered (maximum footprint).

LINCE DUO SPAN MEASUREMENT: the flyscreen will be supplied with increased width measurements + 82 mm (41x2) and height equal to the span measurement.

LINCE GHOST SPAN MEASUREMENT: the flyscreen will be supplied with increased width measurements + 82 mm (41x2) and height + 41 mm.

SPAN MEASUREMENT LINCE 51: the flyscreen will be supplied with increased dimensions in width + 82 mm (41x2) and height + 41 mm.

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Lince V	400	500	1600	2500
Lince L	400	500	1400	2600
Lince L Double	800	500	2800	2600

For double door versions, make sure that each door complies with the recommended single door dimensions. Specify off-centre opening when ordering, if desired. Unless otherwise specified, the flyscreen will be manufactured with the box on the left (inside view).

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix	Walnut 102-70R	Cherry red natural	Striped Douglas	
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix	Medium walnut natural	Renolit clear	Renolit white	
Dark brown Painted	Green 6005 matt				Dark walnut natural	Renolit dark		

Ral Raffaello Copper-red Wood / Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested. For the stock colours of the recessed profiles please refer to the dedicated pages.



FASTENING NET WITH CO-EXTRUDED SYSTEM

auriga

Vertical spring-loaded flyscreen with brush



STANDARD FEATURES

- Grey glass fibre net
- Guide with brush
- retractable box

Special nets and fabrics on request

- | | |
|-------------------------|------------------|
| Fibreglass net ●● | Fabrinet ●● |
| Two-tone net | Bettervue net ●● |
| Lookout net | Tuffscreen net |
| Sunox antibacterial net | Darkening ●●●● |
| Anti-pollen net | Filtering ○● |

Optional on request

- Windproof brush
- Positioning template
- Slow System
- Power lift kit

Rods and accessories



auriga / auriga double
Lateral recessed mounting flyscreen with spring and brush



NEW
Power lift kit with brush insert

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with larger dimensions:

Auriga: width + 70 (35X2) mm / height + 47 mm


Lauriga: width + 82 mm / height + 35 mm

Lauriga Double: width + 94 mm / height + 35 mm

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Auriga	400	500	1800	2400
Lauriga	400	500	1500	2600
Lauriga Double	800	500	3000	2600

FOOTPRINT (mm)

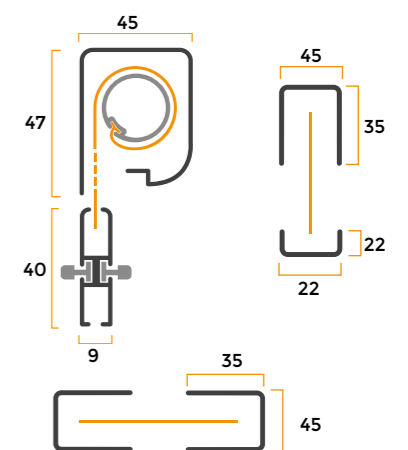

For double door versions, make sure that each door complies with the recommended single door dimensions. Specify off-centre opening when ordering, if desired. Unless otherwise specified, the flyscreen will be manufactured with the box on the left (inside view).

Aluminium Colours


- | | | | | | | | | |
|--------------------|----------------------|-----------------|----------------------|-----------|------------------|-----------------------|--------------------|------------------|
| White 9010 | Ivory 1013 | Brown 8017 matt | Dark bronze Painted | Grey mix | Brown Copper-red | Walnut 360-70R | Cherry red rough | Chestnut 378-70R |
| White 9010 matt | Silver 9006 Painted | Bronze Painted | White 9010 soft | Brown mix | | Walnut 102-70R | Cherry red natural | Striped Douglas |
| Grey 7001 | Grey 7016 anthracite | Black 9005 matt | Metallised iron grey | Green mix | | Medium walnut natural | Renolit clear | Renolit white |
| Dark brown Painted | Green 6005 matt | | | | | Dark walnut natural | Renolit dark | |

Ral Raffaello Copper-red Wood

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



FASTENING NET WITH CO-EXTRUDED SYSTEM



WINDPROOF BUTTONS ON NET EDGE



perseo

Recessed flyscreen with vertical chain winding

moon

Recessed flyscreen with vertical spring-loaded winding mechanism



STANDARD FEATURES

- Welded and riveted grey glass fibre net
- retractable box
- Windproof buttons at net edge

Special nets and fabrics on request

- | | |
|-------------------------|------------------|
| Fibreglass net ●● | Fabrinet ●● |
| Two-tone net | Bettervue net ●● |
| Lookout net | Tuffscreen net |
| Sunox antibacterial net | Darkening ●●●● |
| Anti-pollen net | Filtering ○● |

Optional on request

Slow System

VARIANTS

Moon Fast
Ratchet opening for vertical system

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with increased measurements:

Moon 45: width +70 (35x2) mm, height + 45 mm

Moon 50: width + 70 (35x2) mm, height + 50 mm


Perseo 50: width + 70 (35x2) mm, height + 50 mm

When calculating the measurements shown in the table, the thickness in mm of the fastening brackets is not taken into account.

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Moon	400	500	1600	2400
Perseo	400	500	1400	2600

FOOTPRINT (mm)

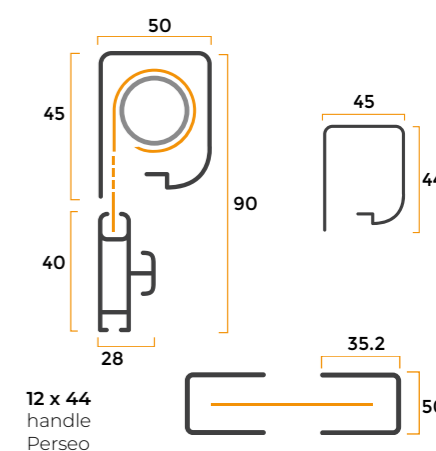

Aluminium Colours


White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix	Walnut 102-70R	Cherry red natural	Striped Douglas	
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix	Medium walnut natural	Renolit clear	Renolit white	
Dark brown Painted	Green 6005 matt				Dark walnut natural	Renolit dark		

Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



FASTENING NET WITH CO-EXTRUDED SYSTEM



WINDPROOF BUTTONS ON NET EDGE



aquila double double door

aquila

Lateral recessed mounting flyscreen with spring and buttons



STANDARD FEATURES

- Welded and riveted grey glass fibre net retractable box
- Windproof buttons at net edge

Special nets and fabrics on request

Fibreglass net ●●	Fabrinet ●●
Two-tone net	Bettervue net ●●
Lookout net	Tuffscreen net
Sunox antibacterial net	Darkening ●●●●●
Anti-pollen net	Filtering ○●

Optional on request

Slow System

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with increased measurements:

Aquila 45: width + 80 mm / height + 35 mm

Aquila 50: width + 85 mm / height + 35 mm.

Aquila Double 45: width + 90 mm / height + 35 mm


Aquila Double 50: width + 100 mm / height + 35 mm

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Aquila	400	500	1500	2500
Aquila Double	800	500	3000	2500

For double door versions, make sure that each door complies with the recommended single door dimensions. Specify off-centre opening when ordering, if desired. Unless otherwise specified, the flyscreen will be manufactured with the box on the left (inside view).

FOOTPRINT (mm)

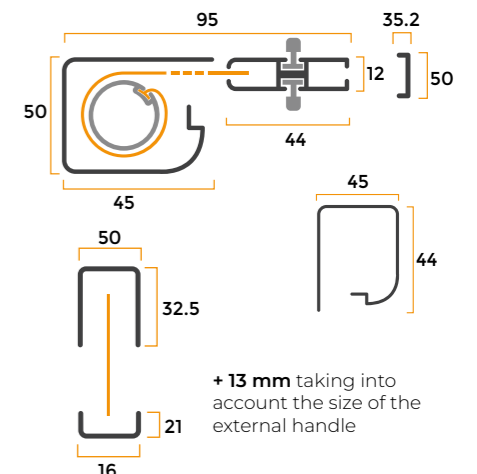

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix	Walnut 102-70R	Cherry red natural	Striped Douglas	
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix	Medium walnut natural	Renolit clear	Renolit white	
Dark brown Painted	Green 6005 matt				Dark walnut natural	Renolit dark		

Ral Raffaello Copper-red Wood

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



NO BARRIER



FASTENING NET WITH CO-EXTRUDED SYSTEM



Brushed tracks



Windproof system net No Out

MEGA recessed system

Lateral-sliding windproof flyscreen with retractable guide and recessed kit available in various versions



STANDARD FEATURES

- Grey glass fibre net
- Wind brush in the tracks
- Walk-on floor guide in PVC
- Profiles with magnetic attachment
- Handle bar stationary in any position
- No Out net windproof system

Special nets and fabrics on request


- | | |
|-------------------------|------------------|
| Fibreglass net ●● | Fabrinet ●● |
| Two-tone net | Bettervue net ●● |
| Lookout net | Tuffscreen net |
| Sunox antibacterial net | Darkening ●●●● |
| Anti-pollen net | Filtering ○● |

Optional on request


- Leather handle

Set-up for recessed system

Flyscreen with Duo recessed kit

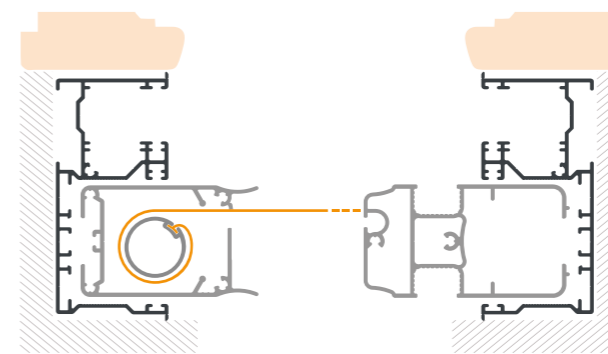

Flyscreen with recessed kit 51

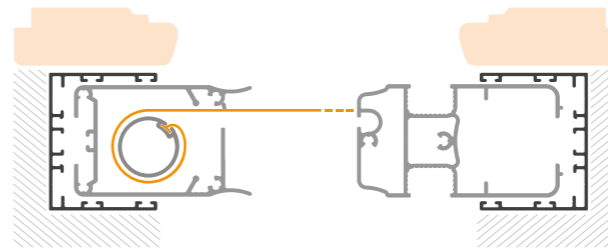

The flyscreen and guides can be ordered separately

Mega® complete with recessed kits

The flyscreen will be supplied with the chosen kit with set-up for recessed installation plus accessories (if applicable). **E.g. to order a Mega® flyscreen with Duo recessed, write Mega® Full Duo.**

Mega® A (flyscreen only)

Only the flyscreen set-up for recessed installation will be supplied, without a recessed kit. **E.g. to order only the Mega® flyscreen for recessed mounting write Mega® A + specify the type of recessed guides in use.**

Mega® B (recessed kit only)

Only the chosen kit with recessed set-up plus accessories (if applicable) will be supplied.

E.g. to order only the Duo recessed kit set-up for Mega®, write Mega® B - Duo.

IMPORTANT!

In the case of already installed recessed guides, please specify when ordering. Recessed kits with set-up for Mega® must be equipped with a magnet. **In the case of Duo kits, please specify the box side (LEFT or RIGHT internal view)**

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be supplied in the same size as ordered (maximum footprint).

SPAN MEASUREMENT: the product will be supplied with increased dimensions:

Mega Duo: L+82 mm (41x2) / H equal to the span measurement

Mega 51 - 2 sides: L+82 mm (41x2) / H equal to span size

RECOMMENDED DIMENSIONS (in mm)

Mega®	L/min	H/min	L/max	H/max
Mega®	400	500	2000	3000
Mega® Double	L/min	H/min	L/max	H/max
Mega® Double	800	500	4000	3000

For double door versions, make sure that each door complies with the recommended single door dimensions. Specify off-centre opening when ordering, if desired.

IMPORTANT! The height must exceed the width by at least 10 cm.

White accessories

supplied as standard on aluminium colours White 9010.

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix	Walnut 102-70R	Cherry red natural	Striped Douglas	
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix	Medium walnut natural	Renolit clear	Renolit white	
Dark brown Painted	Green 6005 matt				Dark walnut natural	Renolit dark		

Ral


Raffaello

Copper-red

Wood

Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested. For the stock colours of the recessed profiles please refer to the dedicated pages.

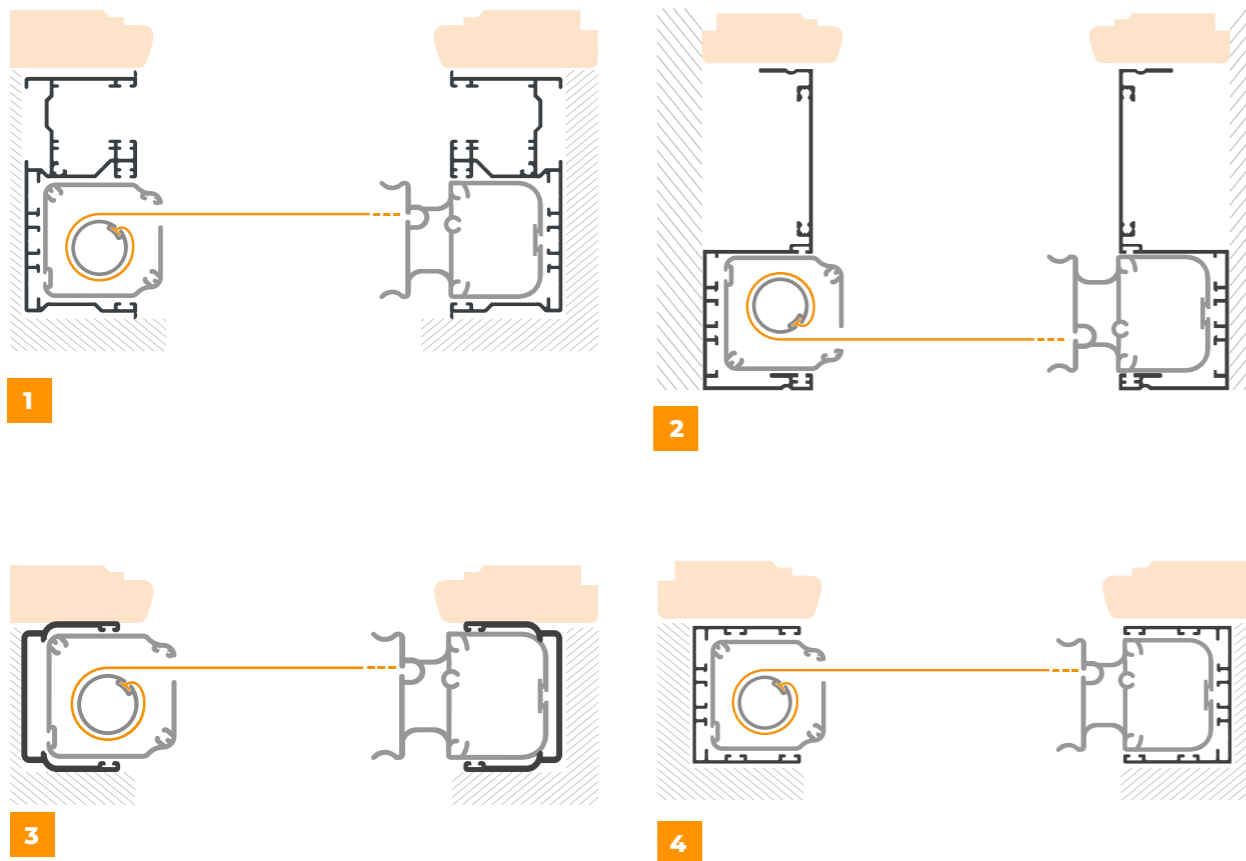

recessed scenipro

Lateral sliding flyscreen with retractable guide with recessed kit available in various versions



Scenipro with recessed kit

1. Scenipro Duo
2. Scenipro Ghost
3. Scenipro 50
4. Scenipro 51

For the flyscreen characteristics, refer to the dedicated tab.

The flyscreen and guides can be ordered separately

Scenipro with recessed kit

The flyscreen will be supplied with the chosen kit with set-up for recessed installation plus accessories (if applicable). **E.g.** To order a Scenipro flyscreen with Duo recessed kit, write **Scenipro Duo**.

Scenipro A (flyscreen only)

Only the flyscreen set-up for recessed installation will be supplied, without a recessed kit. **E.g.** to order only the Scenipro flyscreen for recessed installation write **Scenipro A** + specify the type of recessed guides in use.

Scenipro B (recessed kit only)

Only the chosen kit with recessed set-up plus accessories (if applicable) will be supplied. **E.g.** To order only the Duo recessed kit set-up for Scenipro, write **Scenipro B - Duo**.

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the product will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the product will be supplied with increased dimensions:

Scenipro Duo: L + 82 mm (41x2) / H equal to the span measurement

Scenipro Ghost: L + 82 mm (41x2) /


H + 41 mm

Scenipro 50: L + 76 mm / H + 38 mm

Scenipro 51: L + 82 mm (41x2) / H + 41 mm

IMPORTANT!

In the case of already installed recessed guides, please specify when ordering.

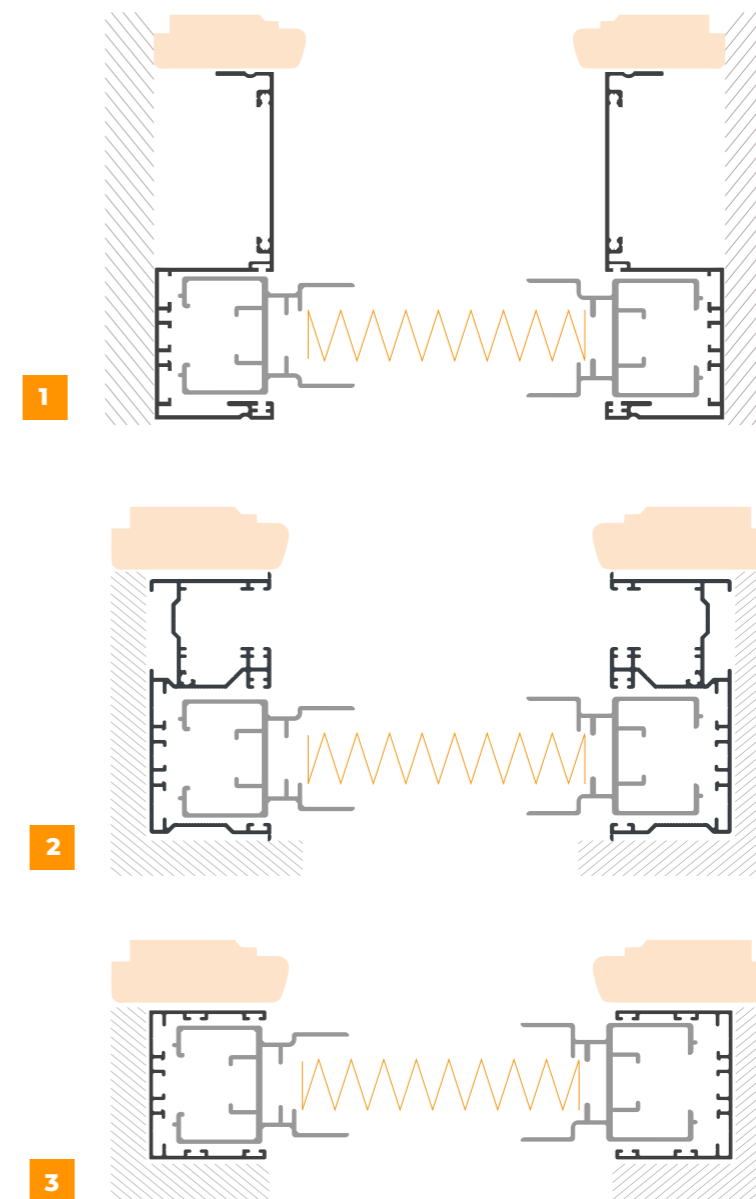

recessed plissé

Pleated lateral-sliding flyscreen and retractable guide with recessed kit available in various versions



Plissé with recessed kit

1. Plissé Ghost
2. Plissé Duo
3. Plissé 51

For the flyscreen characteristics, refer to the dedicated tab.

The flyscreen and guides can be ordered separately

Plissé with recessed kit

The flyscreen will be supplied with the chosen kit with set-up for recessed installation plus accessories (if applicable). **E.g.** to order a Plissé flyscreen with Duo recessed kit, write **Plissé Duo**.

Plissé A (flyscreen only)

Only the flyscreen set-up for recessed installation will be supplied, without a recessed kit. **E.g.** to order only Plissé flyscreen for recessed installation write **Plissé A** + specify the type of recessed guides in use.

Plissé B (recessed kit only)

Only the chosen kit with recessed set-up plus accessories (if applicable) will be supplied. **E.g.** to order only the Duo recessed kit set-up for Plissé, write **Plissé B - Duo**.

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the product will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the product will be supplied with increased dimensions:

Plissé Ghost: L + 82 mm (41x2) /

H + 41 mm


Plissé Duo: L + 82 mm (41x2) / H equal to the span measurement

Plissé 51: L + 82 mm (41x2) / H + 60 mm

IMPORTANT!

In the case of already installed recessed guides, please specify when ordering.

Compatible profiles also per model

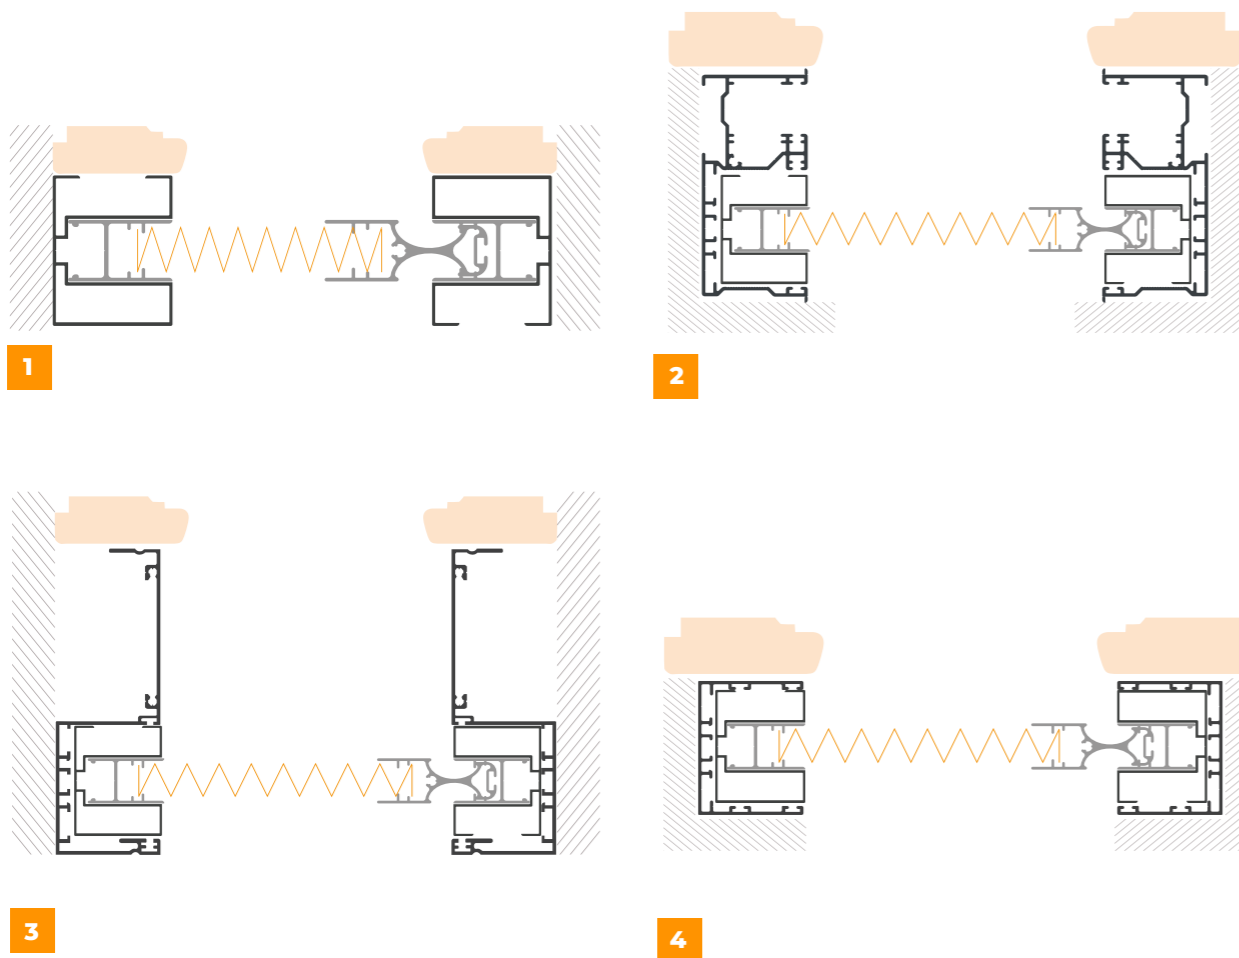

recessed Colomba

Friction-control and space-saving pleated flyscreen with recessed kit available in various versions



Colomba with recessed kit

1. Colomba with adapter
2. Colomba Duo with adapter
3. Ghost Colomba with adapter
4. Colomba 51 with adapter

For the flyscreen characteristics, refer to the dedicated tab.

The flyscreen and guides can be ordered separately

Colomba with recessed kit

The flyscreen will be supplied with the chosen kit with set-up for recessed installation plus accessories (if applicable). **E.g. to order Colomba flyscreen with Duo recessed kit, write Colomba Duo.**

Colomba A (flyscreen only)

Only the flyscreen set-up for recessed installation will be supplied, without a recessed kit. **E.g. to order only a Plissé flyscreen for recessed installation write Colomba A + specify the type of recessed guides in use.**

Colomba B (recessed kit only)

Only the chosen kit with recessed set-up plus accessories (if applicable) will be supplied. **E.g. to order only the Duo recessed mounting kit set-up for Colomba, write Colomba B - Duo.**

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the product will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the product will be supplied with increased dimensions:

Colomba with adapter:
L + 70 mm (35x2) / H + 35 mm

Colomba Duo with adapter:
L + 82 mm (41x2) / H equal to the span measurement

Ghost Colomba with adapter:
L + 82 mm (41x2) / H + 41 mm

Colomba 51 with adapter:
L + 82 mm (41x2) / H + 41 mm

IMPORTANT!

In the case of already installed recessed guides, please specify when ordering.

The flyscreen and guides can be ordered separately

Full Flyscreen with recessed kit


The flyscreen model will be supplied with the chosen kit plus accessories (if applicable).

A (flyscreen only)

The chosen flyscreen model will be supplied ready for recessed mounting, but without a recessed kit. In the case of version A, it is advisable to specify which recessed kit set-up is preferred or whether guides are already in use.

B (recessed kit only)

Only the chosen kit with recessed set-up plus accessories (if applicable) will be supplied. If known, you should specify for which model of flyscreen you wish to set up the recessed system.

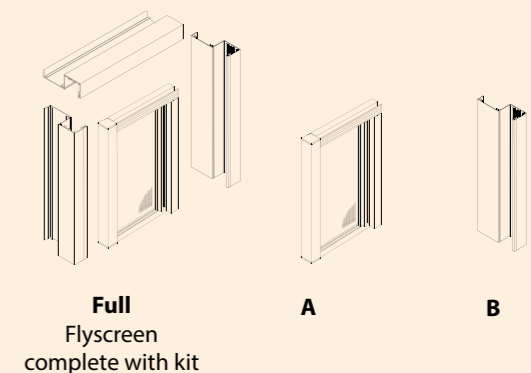

Flyscreens with recessed kit of your choice

Product	Flyscreen	recessed kit included
Mega® complete with Duo kit	Mega®	Duo
Mega® complete with Kit 51	Mega®	51
Plissé complete with Ghost Kit	Plissé	Ghost
Plissé complete with Duo Kit	Plissé	Duo
...		

Only flyscreens set-up for the recessed kit, supplied without kit (if known, please specify which recessed kit you wish the set-up or if guides are already in use)

Product	Flyscreen
Mega® A Duo	Mega®
Mega® A 51	Mega®
Plissé A Ghost	Plissé
Plissé A Duo	Plissé
...	

Recessed kit only (specify, if known, for which flyscreen model you wish the set-up of the recessed system)

Product	recessed kit
Mega® B Duo	Duo
Mega® B 51	51
Plissé B Ghost	Ghost
Plissé B Duo	Duo
...	

rigid panel line



rigid panels

- 90 sagittario**
fixed panel
- 92 capricorno**
hinged door
- 94 freccia/freccia slide**
flyscreen with up-and-down panels
and sliding mechanism



sagittario

Fixed panel flyscreen

STANDARD FEATURES

- Natural aluminium net
- Single profile
- High wind resistance

INSTALLATION VARIANTS

- fastening with screw and hole in corners

ON REQUEST


- wall mounting
- ladybird mounting
- magnetic corner
- magnetic perimeter

Special nets and fabrics on request


Aluminium net ●●	Petscreen ●●
Stainless steel net	Fabrinet ●●
Cristal Cloth	Fibre nets
Filtering ○●	Darkening ●●○●●

Optional on request

Traverse	Oblique angle
Centring	Shaping
Hatch	

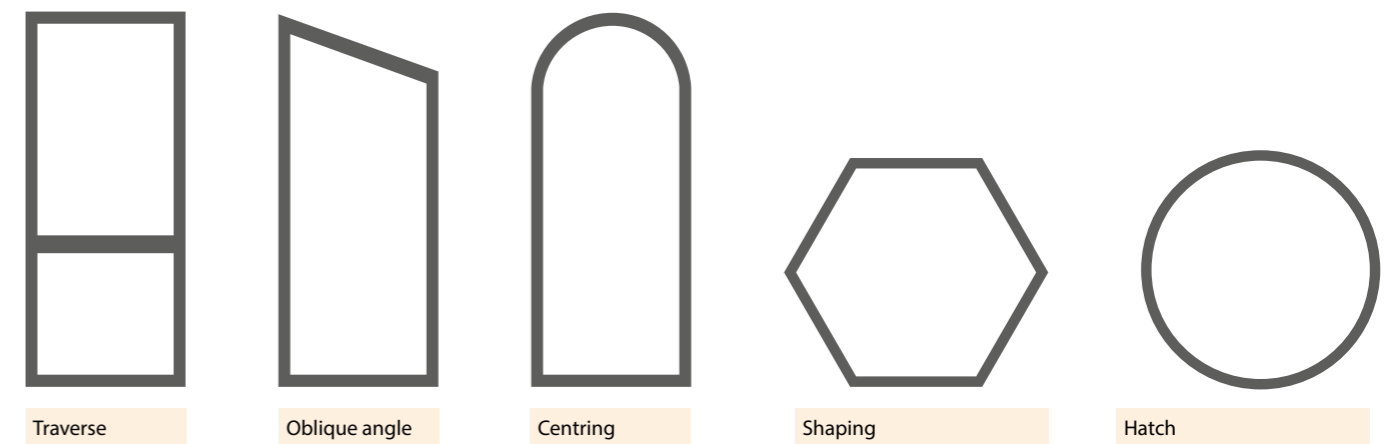

INSTALLATION VARIANTS

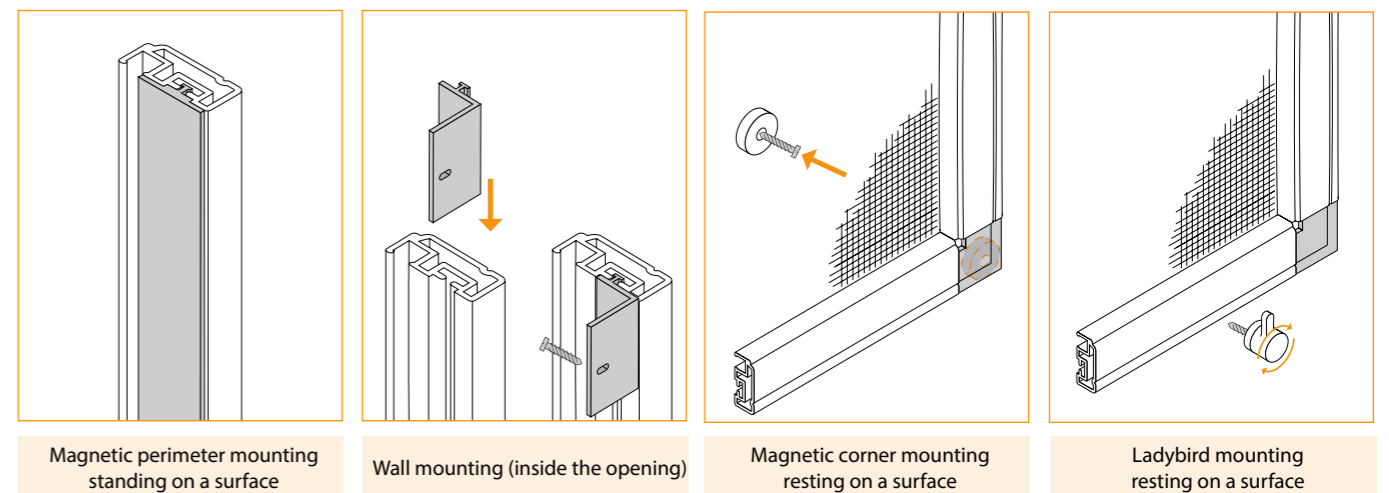

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.

RECOMMENDED DIMENSIONS (in mm)


Sagittario	L/min	H/min	L/max	H/max
	130	130	1400	2200

For centred and hatch variants or special shapes, please send us a template.

Specify internal view for shaped or oblique corner variants.


If both sides exceed 1760 mm, only glass fibre net may be applied.

FOOTPRINT (mm)



13.4 mm in the version with magnetic perimeter

38 mm taking into account the footprint of the wall-mounting accessory



Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix		Walnut 102-70R	Cherry red natural	Striped Douglas
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix		Medium walnut natural	Renolit clear	Renolit white
Dark brown Painted	Green 6005 matt					Dark walnut natural	Renolit dark	

Ral Raffaello Copper-red Wood / Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



capricorno

Flyscreen with hinged door



STANDARD FEATURES

- Natural aluminium net
- Z-frame
- Traverse height 90 cm
- Side registers

Special nets and fabrics on request


- | | |
|---------------------|-----------------|
| Aluminium net ●● | Petscreen ●● |
| Stainless steel net | Fabrinet ●● |
| Cristal Cloth | Fibre nets |
| Filtering ○● | Darkening ●●○●● |

VARIANTS

- L-frame
- 4-sided frame

Optional on request


- | | |
|------------------------------------|--------------------|
| Swinging pet door | Asymmetrical Doors |
| Centring | Fixed transom |
| Choice of traverse height | Door closing hinge |
| Plexiglass inserts / polycarbonate | Saloon zip |

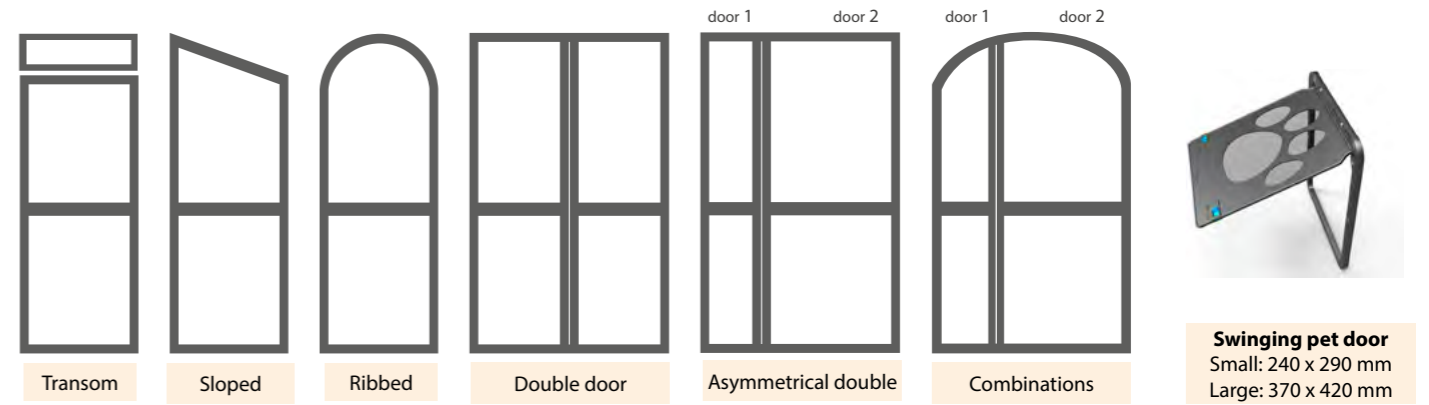

For the **asymmetrical door**, after specifying the version, please specify the number of the door in question and the dimensions.
E.g. Door 1 L 500 mm - Door 2 L 800 mm

For non-standard doors, it may be necessary to provide a cutting template to the company.

OPENING TYPE - INTERNAL VIEW

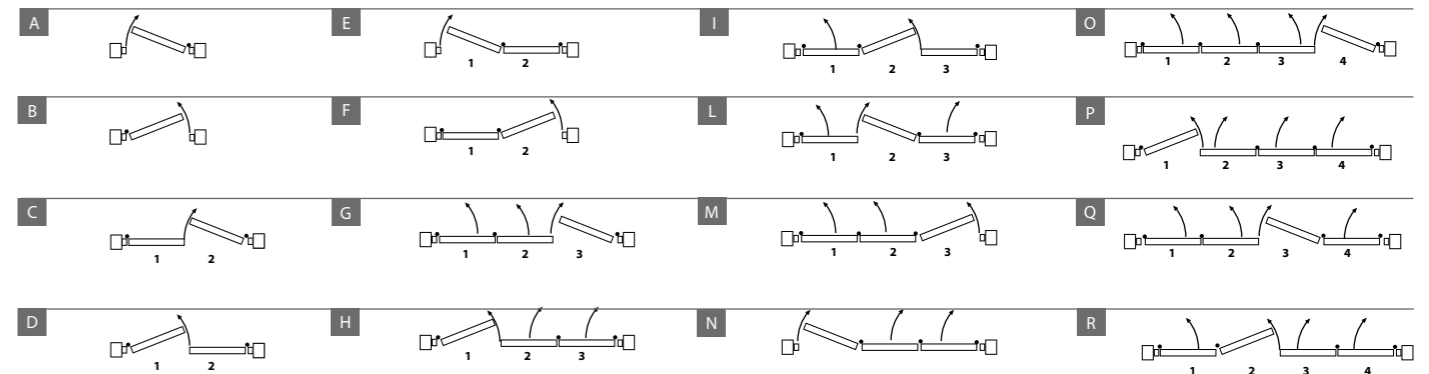

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.

COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.

Specify the type of opening when ordering, reporting the corresponding letter according to the diagram.

RECOMMENDED DIMENSIONS (in mm)

	L/min	H/min	L/max	H/max
Capricorno 1 door	400	500	1000	2600
Capricorno 2 doors	800	500	2000	2600

FOOTPRINT (mm)



47 mm taking into account the footprint of the hinges

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix	Walnut 102-70R	Cherry red natural	Striped Douglas	
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix	Medium walnut natural	Renolit clear	Renolit white	
Dark brown Painted	Green 6005 matt				Dark walnut natural	Renolit dark		

/ Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.



arrow

Up-down fixed panel flyscreen



STANDARD FEATURES

- Natural aluminium net
- Maximum footprint 26 mm
- Recessed tray handle

Special nets and fabrics on request

- Aluminium net ●●
- Petscreen ●●
- Stainless steel net
- Fabrinet ●●
- Cristal Cloth
- Fibre nets
- Filtering ○●
- Darkening ●●○●●

Optional on request

- Lowered guide 7 mm in silver colour for Arrow
- Traverse
- 3-way rail (for 3 doors)
- 2-way or 3-way compensator (for 3 doors)


VARIANTS

Arrow Slide
Lateral flyscreen with sliding fixed panels




slide arrow

Sliding fixed panel flyscreen



Lowered guide

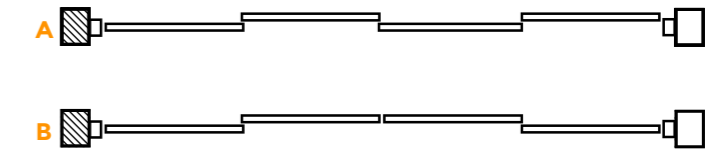

Lock types Arrow Slide 4 doors

- A STANDARD** - The doors are arranged in a chequered pattern and close overlapping.
- B ON REQUEST** - The two central doors close frontally with a magnet.

WHEN ORDERING

Dimensions must be provided in mm, specifying base by height and type of measurement supplied.


COMPLETED MEASUREMENT: the flyscreen will be delivered with the same dimensions as those ordered (maximum footprint).

SPAN MEASUREMENT: the flyscreen will be supplied with 2 mm less on the base and height than the opening dimensions.

RECOMMENDED DIMENSIONS (in mm)

Arrow	L/min	H/min	L/max	H/max
	400	500	1400	1600
Arrow Slide	L/min	H/min	L/max	H/max
	800	500	2500	2500
Arrow Slide with traverse	L/min	H/min	L/max	H/max
	400	500	2600	2500

FOOTPRINT (mm)



*40 mm considering a 3-way rail version

Aluminium Colours

White 9010	Ivory 1013	Brown 8017 matt	Dark bronze Painted	Grey mix	Brown Copper-red	Walnut 360-70R	Cherry red rough	Chestnut 378-70R
White 9010 matt	Silver 9006 Painted	Bronze Painted	White 9010 soft	Brown mix	Walnut 102-70R	Cherry red natural	Striped Douglas	
Grey 7001	Grey 7016 anthracite	Black 9005 matt	Metallised iron grey	Green mix	Medium walnut natural	Renolit clear	Renolit white	
Dark brown Painted	Green 6005 matt				Dark walnut natural	Renolit dark		

Ral

Raffaello

Copper-red

Wood

Not in stock

! Minimum dimensions may not be combined with maximum dimensions at all times. The recommended dimensions were taken with a standard net. For dimensions that can be created using special fabrics and nets, please consult the company. The warranty is void if applications exceeding the recommended dimensions are requested.

extras

- extra** | 98 smart home and home automation
- 100 motorised flyscreens
- 102 taking measurements
- 102 glossary of accessories and options
- 103 showcase tools
- 104 nets and sheets
- 106 aluminium colour palette
- 110 fastening profiles and tubulars



motorised flyscreens



An effective insect barrier without having to move a finger, to facilitate operations especially for those who may struggle with small everyday tasks, such as opening and closing a flyscreen.

Motorised flyscreens are identical to traditional flyscreens in their function as they protect against insects and in their appearance as from the frame to the nets, the basic elements are identical, including the ability to fit non-invasively into the window and its frame.


The motor makes the opening and closing functions automatic and it is designed with special devices that regulate the screen movement in the presence of obstacles and make them safe even when children or pets are present.

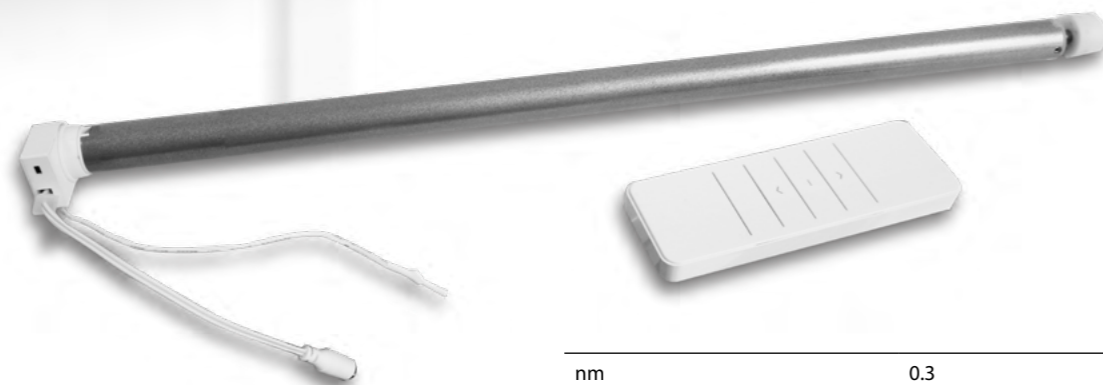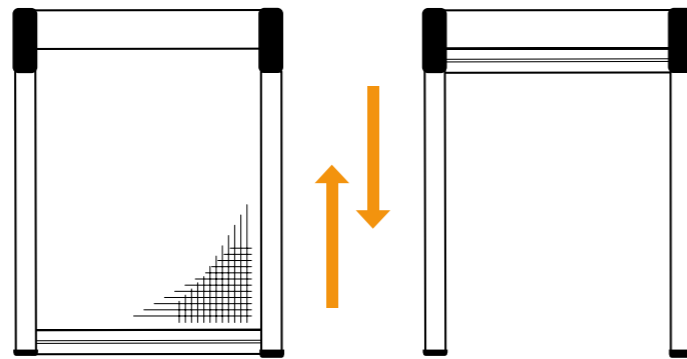


Radio tube motor
Electronic limitation integrated control unit and integrated lithium battery
Ø 16 mm

nm	0.3
rpm	50
Power (W)	8
Number of revolutions before stop	30
l	371 mm

smart home remote

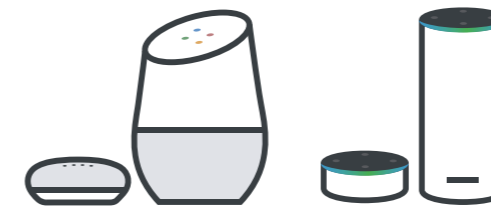

Features	
WiFi 2.4GHz	iOS compatible
Max. 30 motors	Android compatible
Max. 20 timers	Two-way radio control
Max 20 scenes	Unidirectional radio control
Max 20 rooms	USB cable included
Dimensions	177 x 125 x 30 mm approx.



*Connector --- Motor That Talks Back

domus hub

Domus Hub creates a connection via the home WiFi router and allows the user to control the motorised window accessories through a special smartphone app.

It also interacts with Amazon's Alexa and Google's Assistant and allows the connection with other IoT products.

The RS485 interface offers an additional integration option for automation systems offered by third-party.





aries moto

Vertical flyscreen with motorised brush

STANDARD FEATURES

- Grey glass fibre net
- Lateral guide with windproof brush
- Net fastening with co-extruded system
- Right hand side radio tube motor

RECOMMENDED DIMENSIONS (in mm)

Aries Moto	L/min	H/min	L/max	H/max
	440	500	1600	2400



auriga moto

Motorised vertical flyscreen with set-up for recessed installation

STANDARD FEATURES

- Grey glass fibre net
- Lateral guide with windproof brush
- Radio tube motor
- retractable box

RECOMMENDED DIMENSIONS (in mm)

Auriga Moto	L/min	H/min	L/max	H/max
	450	500	1800	2400




OLTRE® V

Motorised flyscreen with verticalwinding and windproof zip for large dimensions

STANDARD FEATURES

- High-strength Tuffscreen net
- Lateral guide with zip system
- Radio tube motor
- Motor with mechanical limit switch

RECOMMENDED DIMENSIONS (in mm)

Over® V 83 motor	L/min	H/min	L/max	H/max
	670	700	2800	2400
Over® V 103 motor	L/min	H/min	L/max	H/max
	820	700	4500	3000



scenipro moto

Lateral winding flyscreen with motorised retractable guide

STANDARD FEATURES

- Grey glass fibre net
- Barrier-free retractable guide
- Fluorescent track
- Openable box

RECOMMENDED DIMENSIONS (in mm)

Scenipro Moto	L/min	H/min	L/max	H/max
	600	800	2000	3000

Contact the company for available automation systems

taking measurements


Taking measurements is a very simple but fundamental operation. A correct measurement makes it possible to optimise the production and installation of the flyscreen as well as to detect any out-of-square situations and thus choose the most suitable model for the opening.

The **completed measurement** represents the precise dimensions the manufactured item will have.

The **span measurement** is the accurate measurement of the window/door opening and to calculate it, it is necessary to measure the following:

- the span height of the flyscreen, meaning the distance between the lower and upper wall, both on the right and on the left side.
- the width of the flyscreen, that is the distance between the right and left wall, both top and bottom

Take the measurements in several points.
If there are any differences write down the lowest.

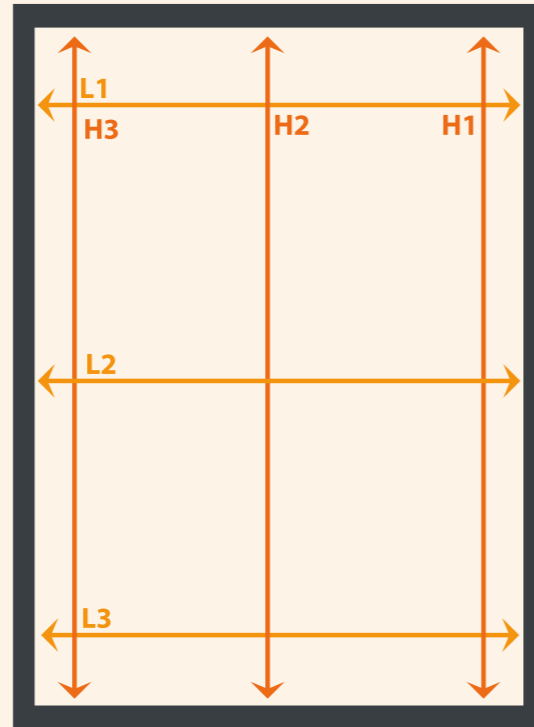

glossary of accessories and options

Controlled opening

The handle bar stops in any position, allowing the opening to be controlled as needed, providing maximum freedom in the use of the flyscreen.

Carter

Closing profile for use when the installation of the flyscreen or part of the fitting is not to be completed.

Spring/chain control

The chain is used for opening and closing, while the spring is used to keep the net always in tension to prevent it from slipping out of the lateral guides.

Positioning template

A template used as a guide for drilling and fastening of the profiles in the brush versions.

Retractable guide

A low track guide which, when the flyscreen is opened, flows into the profiles, leaving the passageway free.

One-piece guide

A single guide with two seats or functions.

Telescopic guide

A guide to compensate for any out-of-square situation in the opening.

Fast System

Ratchet opening and closing system that allows coupling and uncoupling via a push-button handle.

Slow System

The Slow System slows down the winding of the net in the box, eliminating annoying noise and making the movement safer and smoother without the need to fully control the drive.

Windproof brush

Inserted in the guides, it provides better stability and improves grip in the closed position.

Adjustable feet

Ideal to compensate for any out-of-square situation in height and to facilitate hooking and unhooking of the flyscreen.

Press up

Flyscreen opening and closing system that allows easy activation by exerting a slight pressure on the handle bar.

display and promotional tools



tower

A compact display case with pre-selected product samples housed in an elegantly shaped and minimalistic aluminium frame. The wheels at the base facilitate positioning in small spaces in the showcase area, moving and viewing the products on display.

Dimensions

620 x 2100 x 620 cm

Products

- Mega® with standard grey fibre net
- Aries with caps, adjustable feet and Slow system
- Caries with standard black fibre net
- Laries with power lift kit, Slow system and Sunox net
- Tara Press Up with Bettervue net
- Leo with standard grey fibre net
- Idra with Look Out net
- Coloma L with grey pleated net
- Colomba V with pleated darkening drape
- Capricorno with aluminium net and polycarbonate insert




only

Compact sample allowing the display of 1 product of your choice housed in a standard aluminium frame.

Dimensions: 430 x 575 x 100 mm

Fibreglass nets

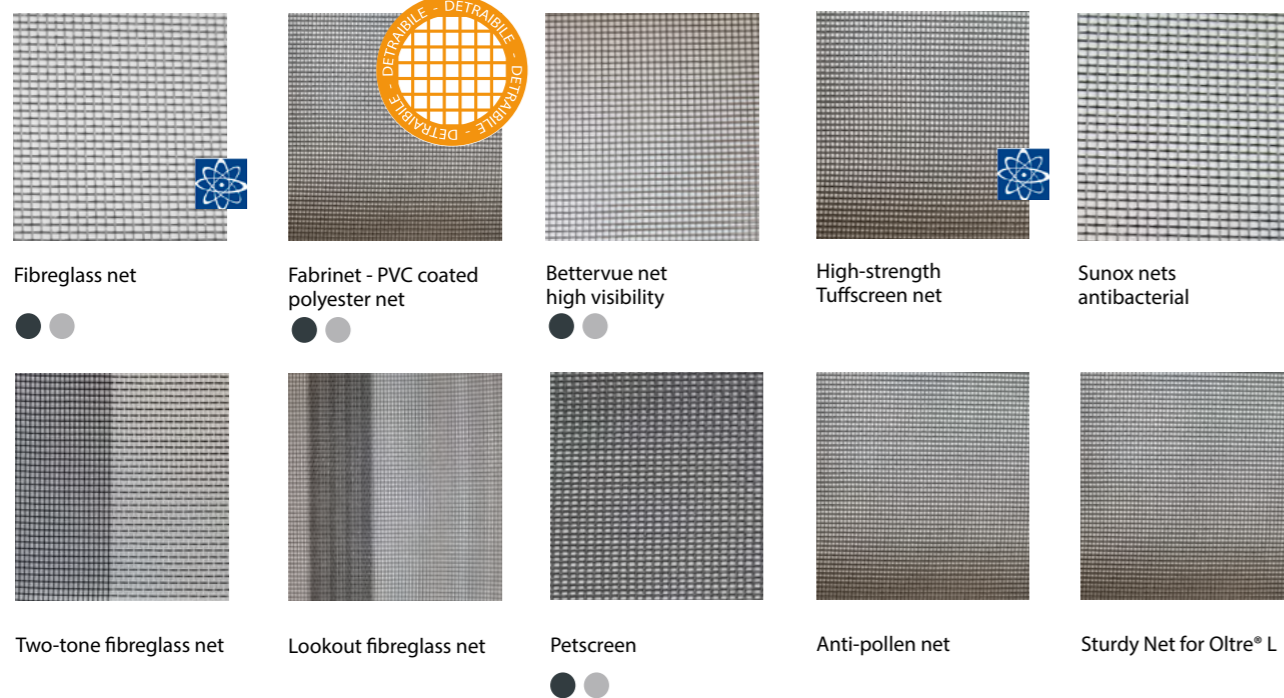

Fibreglass net
● ●

Fabrinet - PVC coated polyester net
● ●

Bettervue net high visibility
● ●

High-strength Tuffscreen net

Sunox nets antibacterial

Two-tone fibreglass net


Lookout fibreglass net

Petscreen
● ●

Anti-pollen net

Sturdy Net for Oltre® L

Drapes and fabrics

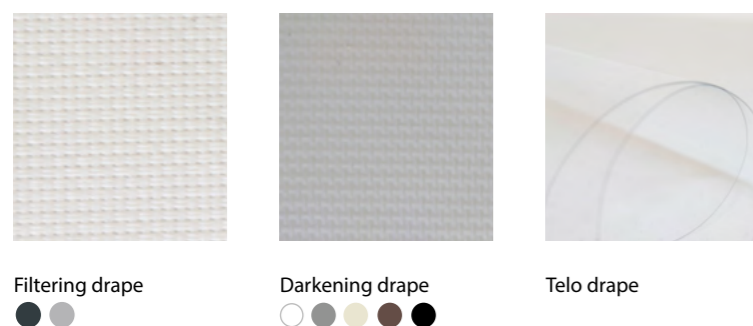


Filtering drape
● ●

Darkening drape
○ ● ● ● ●

Telo drape

Wire nets

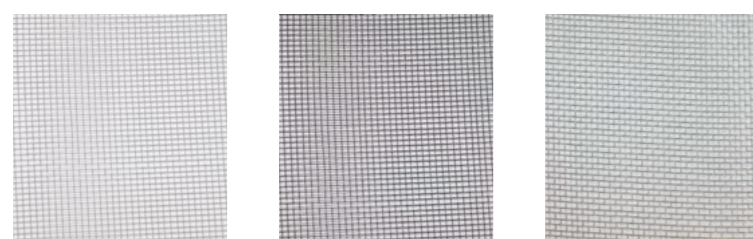

Natural aluminium net

Aluminium net burnished

Stainless steel net




Istituto Giordano is a leading technical agency in Product Testing, Certification, Research and Design.

IMPORTANT!

Special drapes and nets are compatible with certain models, please contact the company for more information. The darkening and filter drapes are for indoor use.

Pleated nets

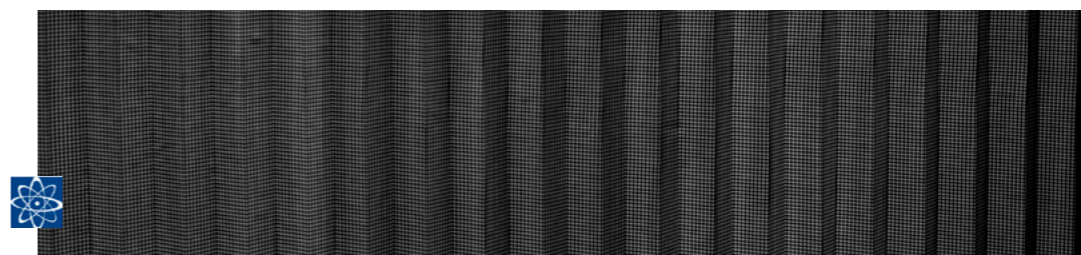

STANDARD BLACK

15 mm fold
20 mm fold



DARKENING DRAPES

15 mm fold







FILTERING DRAPES

15 mm fold









Some particular fabrics and nets may have longer delivery times

Ral

				
White 9010	Ivory 1013	Brown 8017 matt	Painted silver 9006	Painted bronze
				
Dark brown Painted	Grey 7001	Grey 7016 anthracite	Black 9005 matt	Green 6005 matt
				
White 9010 matt				

Raffaello

				
Grey mix	Brown mix	Green mix	Iron grey metallised	Dark bronze Painted
				
White 9010 soft				


Copper-red



Copper brown

Wood Effect

				
Walnut 360-70R	Walnut 102-70R	Medium natural walnut	Dark natural walnut	Rough cherry
				
Natural cherry	Renolit light	Renolit dark	Chestnut 378-70R	Striped Douglas




Renolit white

The company can supply a quote for additional colours
 The best selection of colours in our colour chart is shown. The colours represented may be subject to changes due to production batches and typographic fidelity.

	Sincropliss / Colomba	Picoplis/Picoscenica	Plissé	Aries / Laries / Caries	Ara/Idra/Leo/Tara Press Up Piuma®	Mega®	Scenipro	Oltre® V/Oltre® L	Lince/ Moon/Perseo Aquila/Apus	Auriga	Arrow	Capricorno	Sagittario
White 9010	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Ivory 1013	◆	◆	◆	◆	◆	◆	◆	○	◆	◆	◆	◆	◆
Grey 7001	◆	○	◆	◆	◆	◆	○	○	○	○	○	○	◆
Brown 8017 matt	◆	◆	◆	◆	◆	◆	◆	○	◆	◆	◆	◆	◆
Green 6005 matt	◆	○	◆	◆	◆	◆	◆	○	○	○	◆	◆	◆
Black 9005 matt	◆	○	◆	◆	◆	◆	◆	○	○	○	◆	◆	◆
Dark brown	◆	○	◆	◆	◆	◆	○	○	○	○	○	◆	◆
Painted bronze	◆	◆	◆	◆	◆	◆	◆	○	○	○	◆	◆	◆
Silver painted 9006	◆	◆	◆	◆	◆	◆	◆	○	○	○	◆	◆	◆
Anthracite grey 7016	◆	○	○	◆	○	◆	◆	○	○	○	○	○	◆
White 9010 matt	◆	○	○	◆	○	◆	◆	○	○	○	○	○	◆
White 9010 soft	◆	○	○	◆	○	◆	◆	○	○	○	○	○	◆
Iron metal grey.	○	○	◆	◆	◆	○	○	○	○	○	○	○	◆
Dark bronze painted	◆	○	○	◆	◆	◆	◆	○	○	○	○	○	◆
Green mix	◆	◆	◆	◆	◆	◆	◆	○	○	○	◆	◆	◆
Brown mix	◆	◆	◆	◆	◆	◆	◆	○	○	○	◆	◆	◆
Grey mix	◆	◆	◆	◆	◆	◆	◆	○	○	○	◆	◆	◆
Copper brown	◆	◆	◆	◆	◆	◆	◆	○	○	○	◆	◆	◆
Walnut 360 - 70R	◆	○	◆	◆	◆	◆	○	○	○	○	○	○	◆
Walnut 102 - 70R	◆	○	◆	◆	◆	◆	◆	○	○	○	◆	◆	◆
Medium natural walnut	○	○	◆	○	◆	○	○	○	○	○	○	○	◆
Dark natural walnut	◆	○	◆	◆	◆	◆	○	○	○	○	◆	○	◆
Rough cherry	◆	○	◆	◆	◆	◆	◆	○	○	○	◆	◆	◆
Natural cherry	◆	○	◆	◆	◆	◆	○	○	○	○	◆	○	◆
Striped Douglas	◆	○	◆	◆	◆	◆	○	○	○	○	○	○	◆
Renolit light	◆	◆	◆	◆	◆	◆	◆	○	◆	○	◆	◆	◆
Renolit dark	◆	◆	◆	◆	◆	◆	◆	○	◆	○	◆	◆	◆
Renolit white	◆	○	○	◆	◆	◆	○	○	○	○	○	○	◆
Chestnut 378 - 70R	◆	○	◆	◆	◆	◆	○	○	○	○	○	○	◆

◆ = in stock
○ = longer delivery

Plastic elements

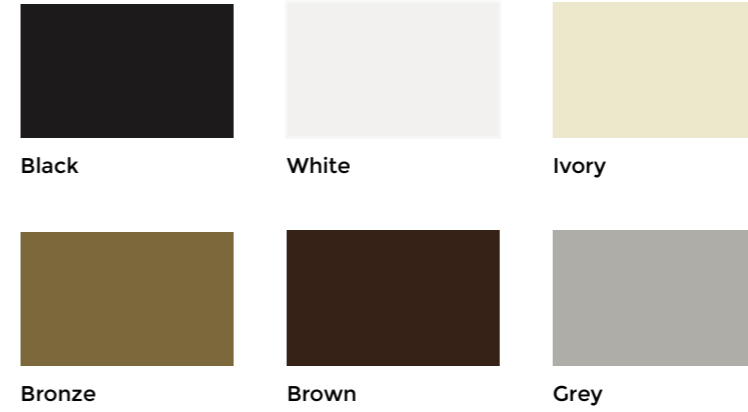

	Ara /Fara /Tara *	Idra /Tidra *	Eridano /Teridano *	Leo /Leo T *	Mega®	Scenipro/ Picoscenica/Picoplis	Colomba/Sincropliss	Aries Series	Aries/Laries 32
● Black	◆	◆	◆	◆	◆	◆	◆	◆	◆
● White	◆	◆	◆	◆	◆	◆	◆	◆	◆
● Ivory	◆	◆	◆	◆	◆	◆	◆	◆	◆
● Brown 8017	◆	◆	◆	◆	◆	◆	◆	◆	◆
● Green	◆	◆	◆	◆	◆	◆	◆	◆	◆
● Grey						◆	◆		


* top cover only.

For models not mentioned in the table, accessories are only available in standard colour e.g. black. Unless specified in the order, the standard accessories will be black.

fastening profiles and tubulars

front fastening

Profile for front fastening of the insect screen

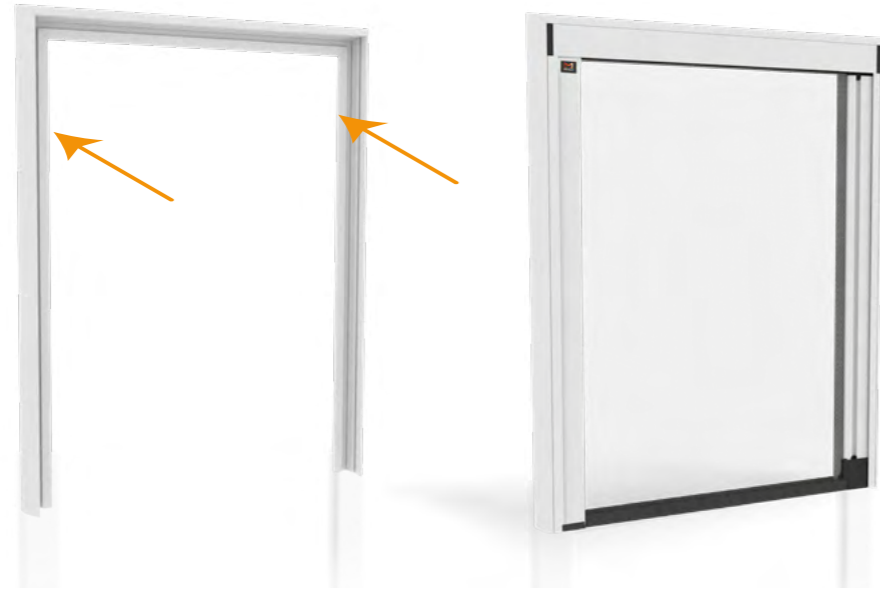

tubular

Profiles for shimming flyscreens or creating the sidewall, if missing.


40 x 20 mm

60 x 20 mm


For other sizes or colours please contact the company

Available colours in stock



White 9010	Ivory 1013	Brown 8017 matt	Dark brown Painted	Green 6005 matt	Grey mix	Metallised iron grey	Brown Copper-red
Grey 7001	Bronze Painted	Silver 9006 Painted	Black 9005 matt		Brown mix	Green mix	
Walnut 360-70R	Walnut 102-70R	Medium walnut natural	Dark walnut natural	Cherry red rough	Cherry red natural	Renolit clear	Renolit dark
Chestnut 378-70R	Striped Douglas	Renolit white					



Front Fastening 40 x 43 mm



Front Fastening 27 x 45 mm

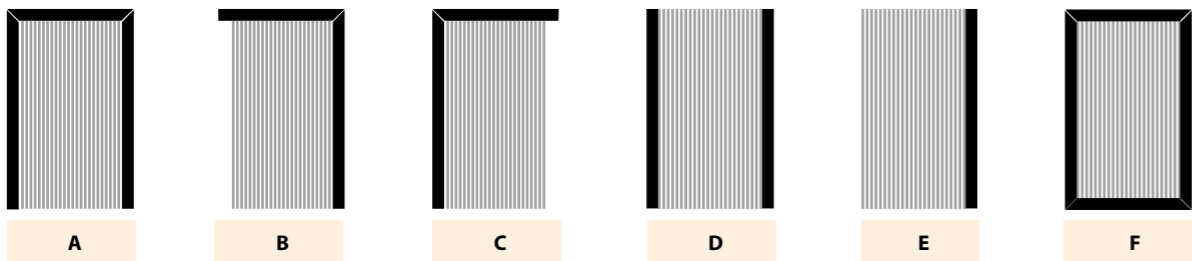

Please specify type when ordering.

Available colours in stock: White 9010, Ivory 1013, Brown 8017 matt

GENERAL TERMS AND CONDITIONS OF SALE

1. Premises and Scope

1.1 These General Terms and Conditions of Sale (GTCS) apply to all purchase orders of flyscreens and/or other custom-made items and/or products marketed according to the instructions provided by the Customer, sent in compliance with what is specified in point 3. below, and form an integral and substantial part of the contracts entered into between the Customer and EFFEZETA SYSTEM SRL.

1.2 In the event of a conflict between these General Terms and Conditions and the terms and conditions agreed in writing for the individual sale and set out in the confirmation email sent by EFFEZETA SYSTEMS SRL, the latter shall prevail.

1.3 For the purpose of these General Terms and Conditions, the term "Customer" shall mean the person, identified by the data entered upon acceptance of these General Terms and Conditions, who requests, orders and purchases the product subject matter of the contract.

1.4 For any clarifications regarding these GTCS, the characteristics of the products, specific conditions and anything else, the Customer is invited to contact EFFEZETA SYSTEM SRL directly as detailed below.

1.5 The version of these GTCS currently in force is always available at www.effezetasystem.com.

2. Prices and terms of payment

2.1 The Prices of the Products are those in the price list valid at the time of delivery and are exclusive of VAT, and shipped ex works. Taxes, duties, shipping, insurance, installation, end-user training, after-sales service, etc. are not included in the prices, unless expressly quoted separately.

2.2 Payment shall be made on the terms and in the manner set out in the invoice. Direct remittances must be made by bank transfer, bank draft or cash. The goods remain the exclusive property of the Company until full and final payment has been made. Payment may not be suspended or delayed for any reason whatsoever. In the event that the Buyer fails to pay according to the terms and in the manner stated on the invoice, in addition to the bank charges, the outstanding handling fee of EUR 15.00 and interest on arrears shall be charged, in addition to the applicable interest rate in force. During the transaction period from non-payment to invoice settlement, the Company shall suspend and/or cancel any orders and/or deliveries in progress and block the Buyer from placing new orders. Once the balance has been paid and following the above, the Company may, at its own discretion, request advances on payments or a security deposit. If the Buyer's business is taken place in a manner that is not in compliance with the ordinary course of business, by which is meant, without limitation, the issuance of seizure orders or liens, or when insolvency proceedings have occurred or are pending, the Company shall have the right to request any pending payment immediately due and payable. The purchaser has no right to set-off, retain or reduce the amounts due unless its claim to do so has been permanently upheld in court.

3. Orders and quotes

3.1 Orders must be placed in writing, by fax or e-mail, using the order form available in the Download section of our website. For telephone orders, the Company is not liable for any errors. Orders must detail the order number, an exact list of the goods ordered with possible reference to their product code, their quantity, measurements, unit and total price, destination address and any further instructions for delivery. In the case of measurements received without specification as to whether they are completed measurements or span measurements, the Company will automatically consider them as completed measurements, unless otherwise specified in the price list. The information detailed in our catalogues or advertising brochures, such as technical characteristics of products or components, dimensions, assembly diagrams, colours, etc., is purely indicative, due to the technical specifications and technological evolution of the company's products. Binding data may be provided from time to time and upon specific request of the same. In order to improve the quality of the product, the Company reserves the right to modify it without prior notice and even after acceptance of the order.

3.2 If the order is preceded by a quote by the Seller, the quote shall be valid for a maximum duration of 30 days, unless otherwise stated. The contract of sale shall in any case be deemed entered into upon confirmation of the order by the Seller. The Purchaser must check that the master data is correct and, if there is an error, report it promptly. Otherwise, the Seller shall not be jointly and severally liable as provided in Art. 41 Presidential Decree 26/10/72, No. 633.

3.3 The Company reserves the right to accept order modifications or cancellations depending on the progress of the order. Any changes must be notified promptly within the day of the order and no later than 24 hours after the order is placed. If no notification is received within 24 hours, the order will be considered confirmed and processed. Therefore, the company will not be able to accept claims regarding products that do not comply with the requirements and will be held harmless of any liability. In any case, changes to or cancellation of the order not notified in writing shall not be accepted.

4. Methods of delivery/shipping

4.1 The Company shall deliver the products to its customers, using a carrier it trusts, or directly if the place of delivery falls within the areas covered by the Company's delivery service.

4.2 EFFEZETA SYSTEM shall not be liable for non-delivery or delayed delivery if this is due to force majeure such as - purely by way of example - strikes, public authority measures, rationing or shortages of energy or raw materials, transport difficulties, fires or floods.

4.3 In the cases provided for in the preceding paragraph, the customer shall not be entitled to any compensation, indemnity or discount for any reason whatsoever.

5. Acceptance and/or return of products

5.1 All products shall be deemed accepted at the time of delivery, subject to the purchaser's right to report defects or non-conformities in the product. This shall be reported IN WRITING and with specific reasons included or the claim shall be void. If delivery is by carrier, check the quantity and packaging of the products and note any differences in the transport document, accepting with reservation. The so-called 'ad nutum' withdrawal is forbidden. Upon prompt notification of the defect or non-conformity, the Company shall, in consultation with the customer, replace the defective products or refund the price. The disputed goods shall be delivered to the Company no later than 7 days from the date of receipt of the claim report for the necessary verifications. The Company is entitled to test the products upon their return and to charge the customer for any costs incurred in the event of an unfounded claim.

6. Warranty

6.1 The seller warrants that the products are free from defects and in compliance with the technical manufacturing specifications. The warranty is for free replacement and/or repair of parts with manufacturing defects. Not covered by the warranty: replacement of drapes worn out by the weather or damaged by third parties. The warranty is excluded for: damage during transport, poor storage, tampering, faulty assembly, inexperience of use, exceeding the performance limits, as well as for all other causes that are not the direct fault of the Seller and if the consequences result from incorrect or incomplete information provided in the order. The warranty is voided automatically when, without the seller's authorisation, replacements, repairs or modifications of any kind are made. In such a case, the Seller shall be held harmless from any civil and criminal liability, and the warranty shall be voided. The statutory warranty periods are peremptory and apply even if the material is not used. Material that is deemed to be defective shall be sent, with prior notice to the Company, carriage paid. The Company shall issue a return authorisation and the replaced material shall remain the property of the Company.

7. Compensation for damages

7.1 For production errors of the goods, defects of the same, as well as their malfunctioning in relation to the agreed purpose of use, for which, in any case, the liability of the Company shall be ascertained, the reproduction and return of the same goods identical in quantity and quality (kind and type), free of any defects and fully functional, shall be recognised exclusively. Therefore, all other costs incurred, such as, for example, dismantling, reassembly, man-hours, travel time, transport charges, etc., as well as any other direct or indirect compensation are excluded.

8. Intellectual and Industrial Property

8.1 The Company reserves all rights to all content (texts, images, etc.) appearing in its printed material and on the website. Such content may only be used by third parties with prior written consent. The customer acknowledges the validity of any exclusive rights arising from the Company's intellectual and industrial property rights.

For any disputes that may arise the jurisdiction is hereby waived in favour of the Court of Santa Maria Capua Vetere.



Browse online the new
Customer area

Full independence in completing
the ordering process

Streamlined and faster procedures

Effective status control
of the order in progress

Effezeta System

CASERTA

Stradisi Hamlet
81017 - S. Angelo d'Alife, CE
+ 39 0823 228358
+ 39 366 7418951
Fax 0823 914258

ROME

Via di Cervara, 129
00155 Rome RM

MILAN

Via Giuseppe di Vittorio, 7
20060 - Liscate, MI

DUBAI

48 Burj Gate, 10th Floor, room 1001
Downtown - Dubai - UAE
tel: +971 4 3216260

Info

info@effezetasystem.com

www.effezetasystem.com





EFFEZETA®
S Y S T E M

Live protected. Live better.

Web version June 2022

The technical diagrams in this catalogue are indicative. The company reserves the right to make changes at any time and without prior notice. We are not liable for damages caused by improper use or improper installation.

The best colours in our colour palette have been shown. The colours replicated may be subject to variations due to production batches and typographic fidelity.